


FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	12 m ³ /h
Max head/Prevalenza massima:	12 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Lip seal/Tenuta a labbro

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

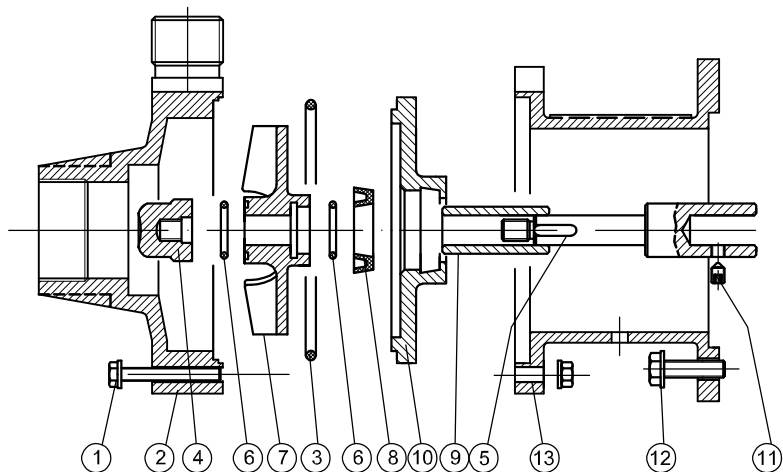


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	LIP SEAL	SHAFT SLEEVE	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 AISI316	EPDM VITON	PP-PVDF	EPDM VITON	AI203	PP+GF PVDF+CF	AISI304	AISI304	PP

CURVES/CURVE 50HZ-2900 RPM

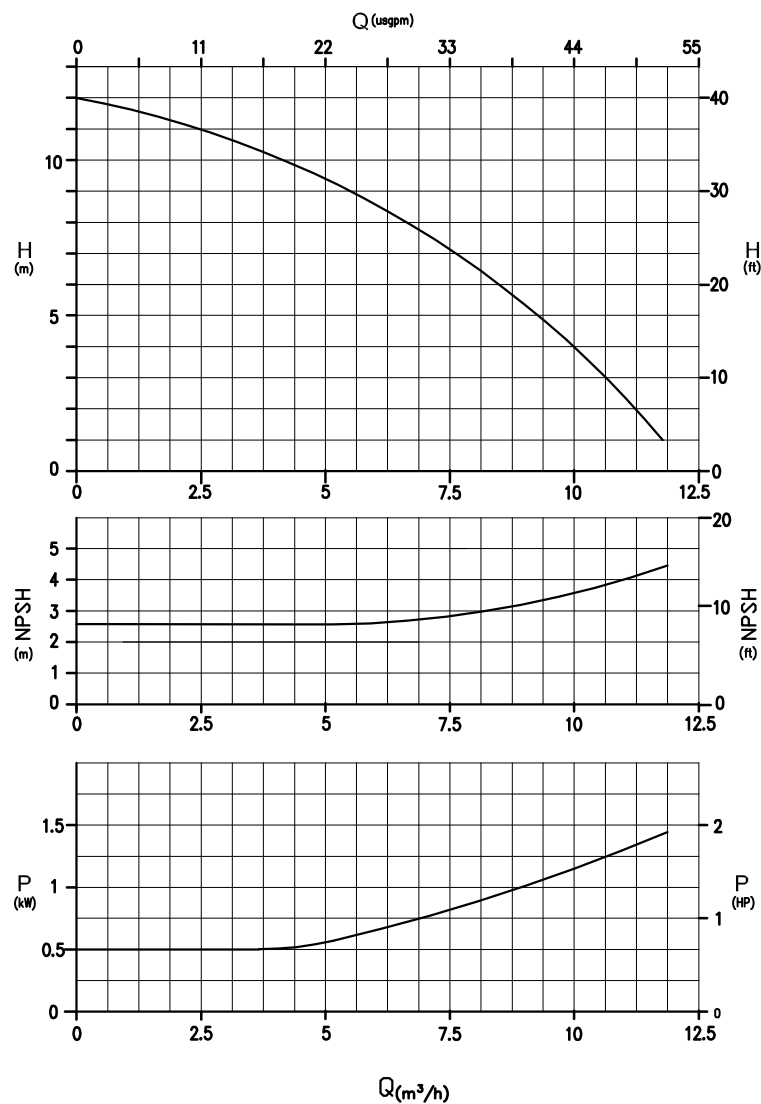

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

DIMENSIONS/DIMENSIONI D'INGOMBRO

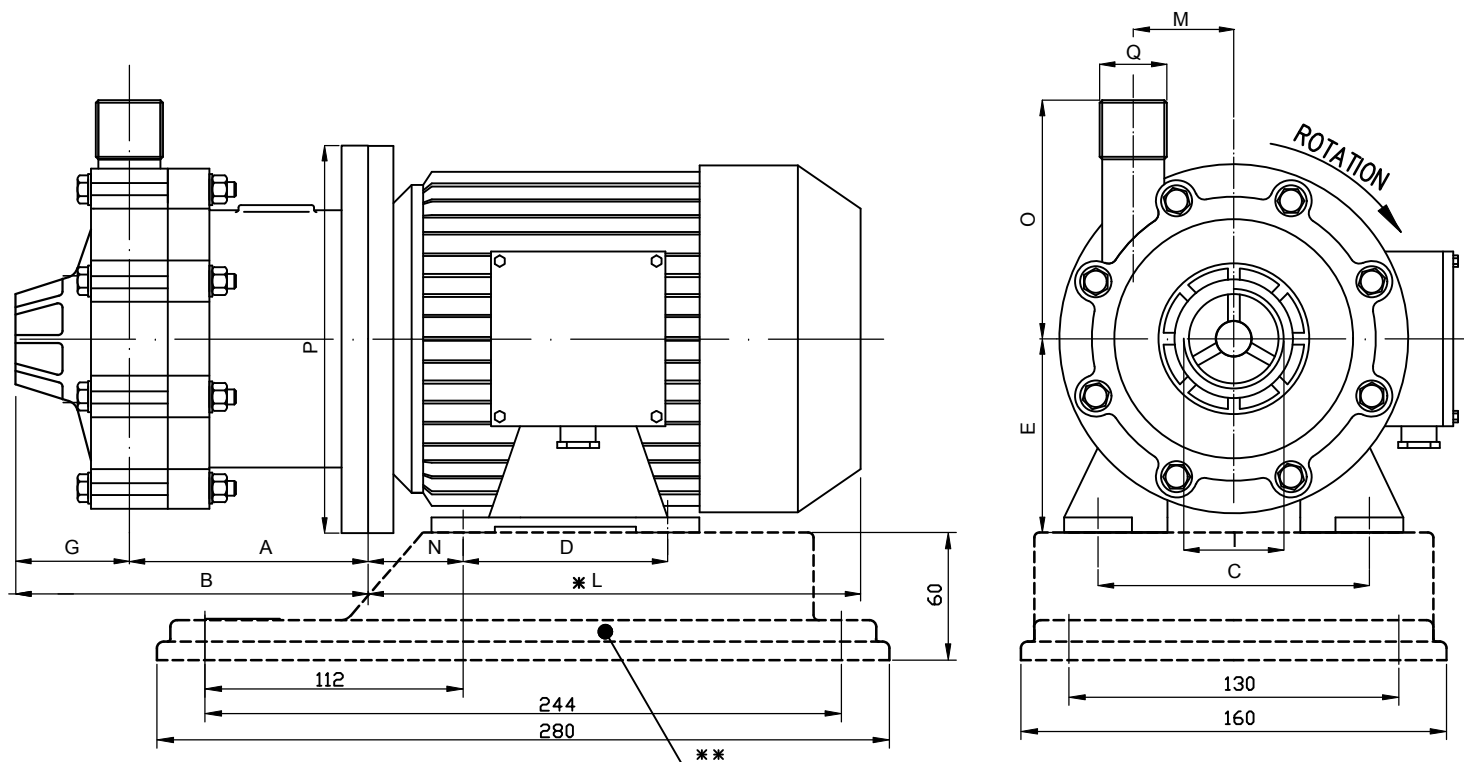


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	✱L	M	N	O	P	Q
HCO 95-10	G 71 B	0.55	110	180	112	90	71	70	1 1/2" FEMALE	215	45	45	100	160	1" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

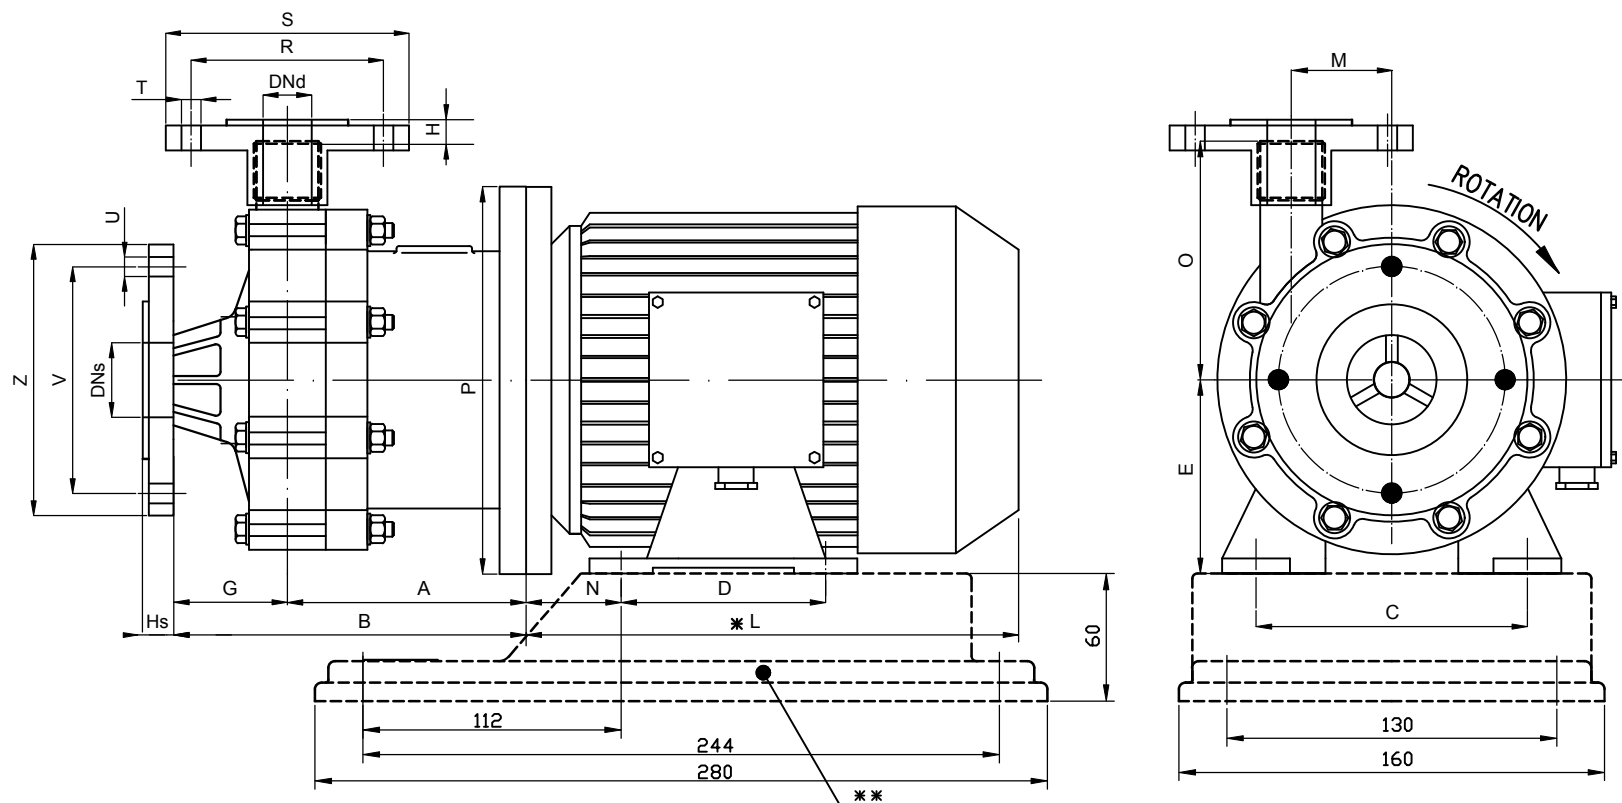

PUMP TYPE	MOTOR FLANGE B3—B5	POT. Kw	DIMENSIONS — mm —													FLANGES DIN PN 10—DIMENSIONS — mm —							
			A	B	C	D	E	Hs	G	H	※L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 95—10	G 71 B	0.55	110	180	112	90	71	20	70	9	215	45	45	100	160	85	115	14	18	110	150	40	25


* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	20 m ³ /h
Max head/Prevalenza massima:	13 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffietto in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

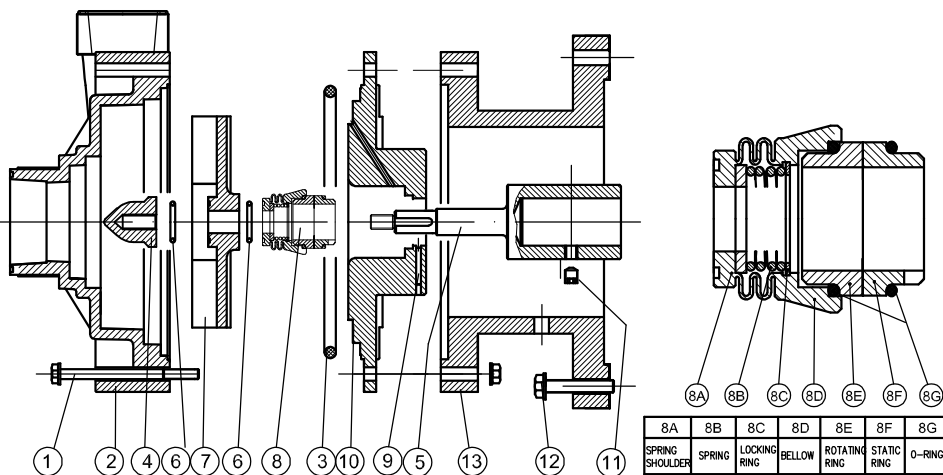


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	AlSi304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 AlSi316	EPDM VITON	PP-PVDF	●	AlSi304	PP+GF PVDF+CF	AlSi304	AlSi304	PP

CURVES/CURVE 50HZ-2900 RPM

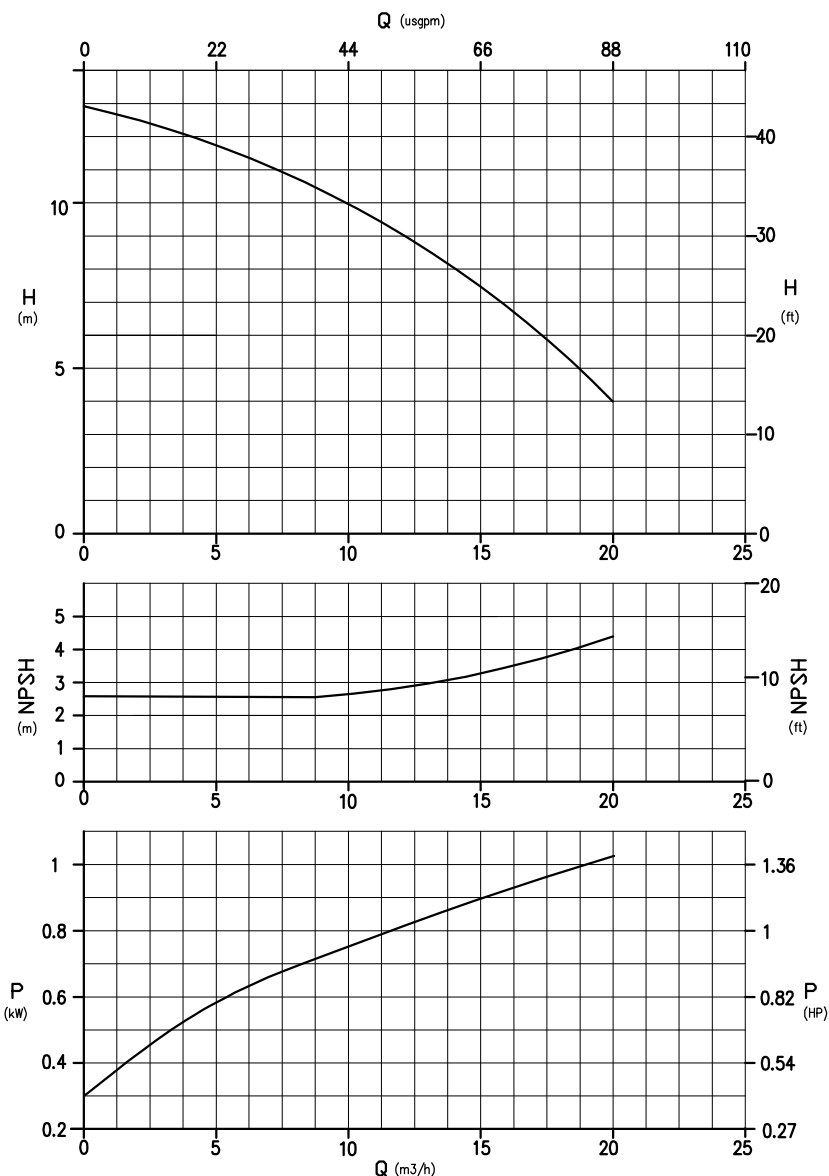

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

DIMENSIONS/DIMENSIONI D'INGOMBRO

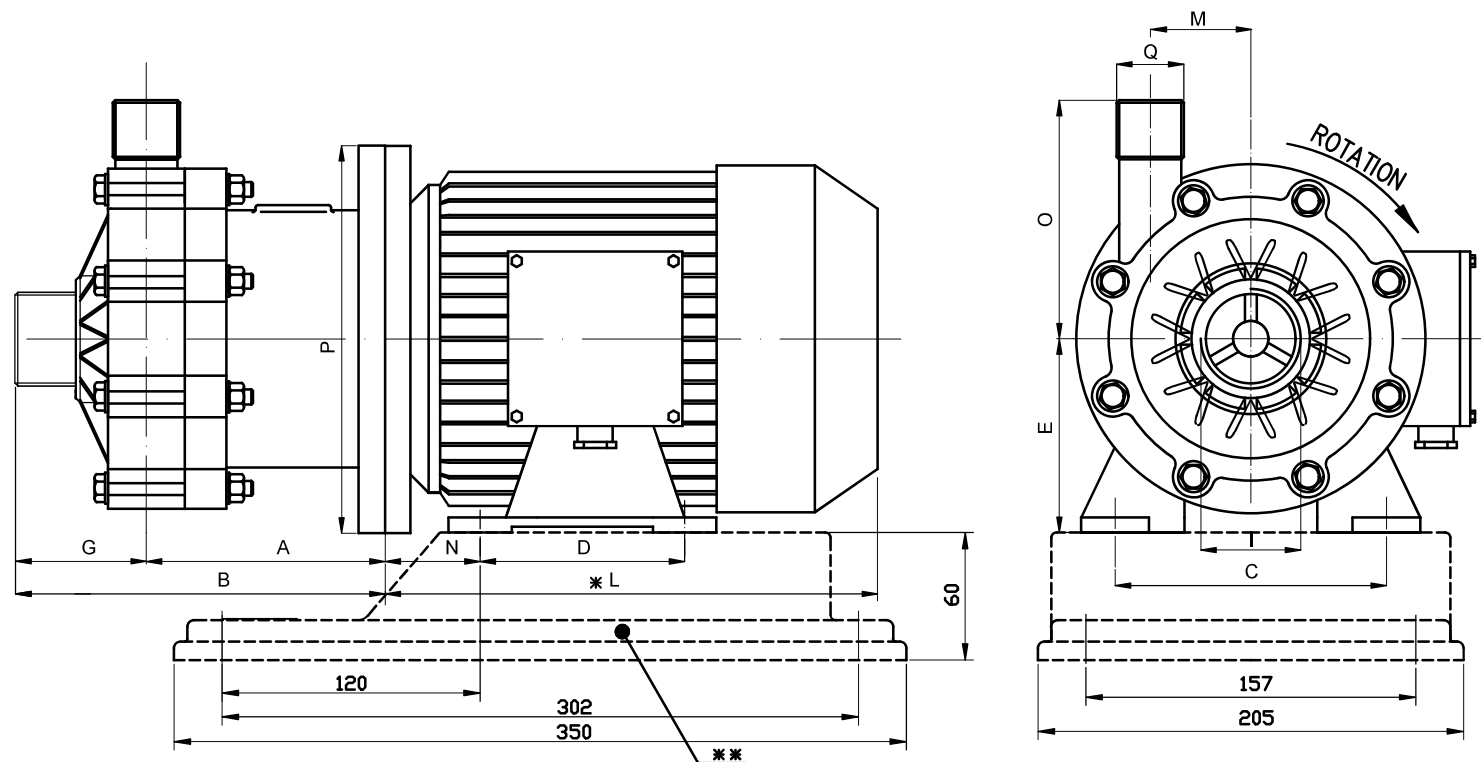


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HCO 110	G 80 B	1.1	199	290	125	100	80	91	2 1/2" MALE	232	66	50	140	200	2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

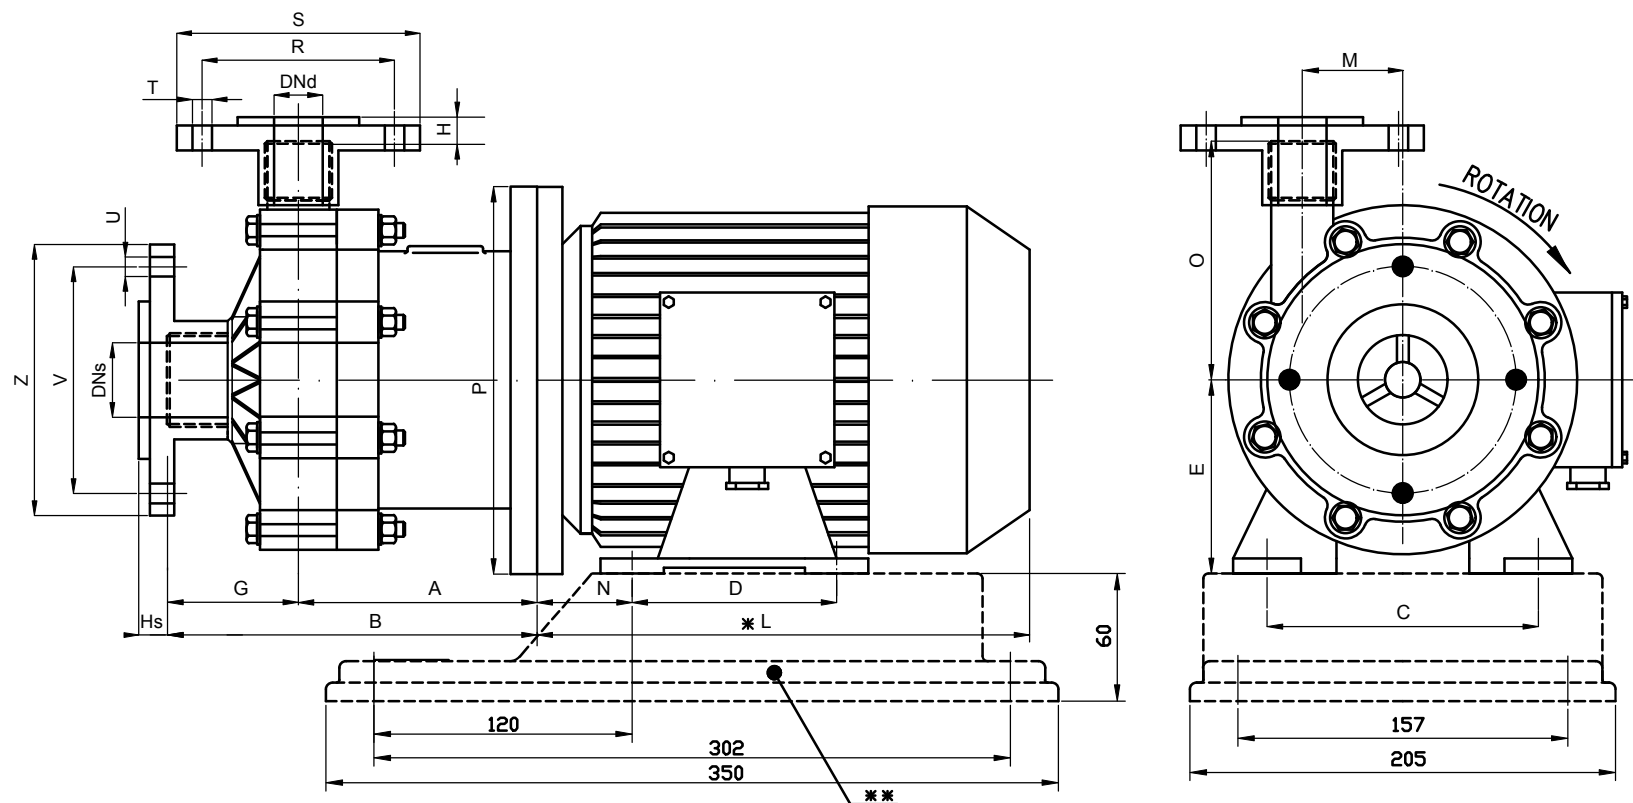

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -													FLANGES DIN PN 10-DIMENSIONS - mm -							
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 110	G 80 B	1.1	199	290	125	100	80	10	91	13	232	66	50	140	200	125	168	18	18	145	188	65	50


* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	25 m ³ /h
Max head/Prevalenza massima:	16 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffietto in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

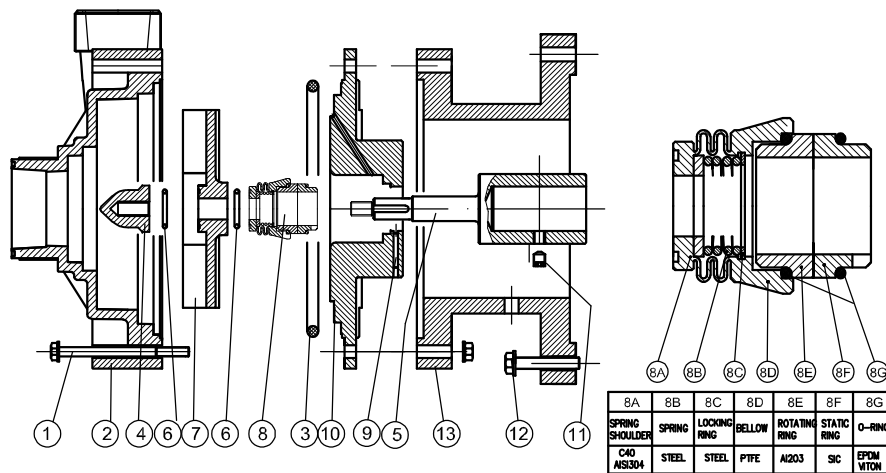

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	AlSi304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 AlSi316	EPDM VITON	PP-PVDF	●	AlSi304	PP+GF PVDF+CF	AlSi304	AlSi304	PP


CURVES/CURVE 50HZ-2900 RPM

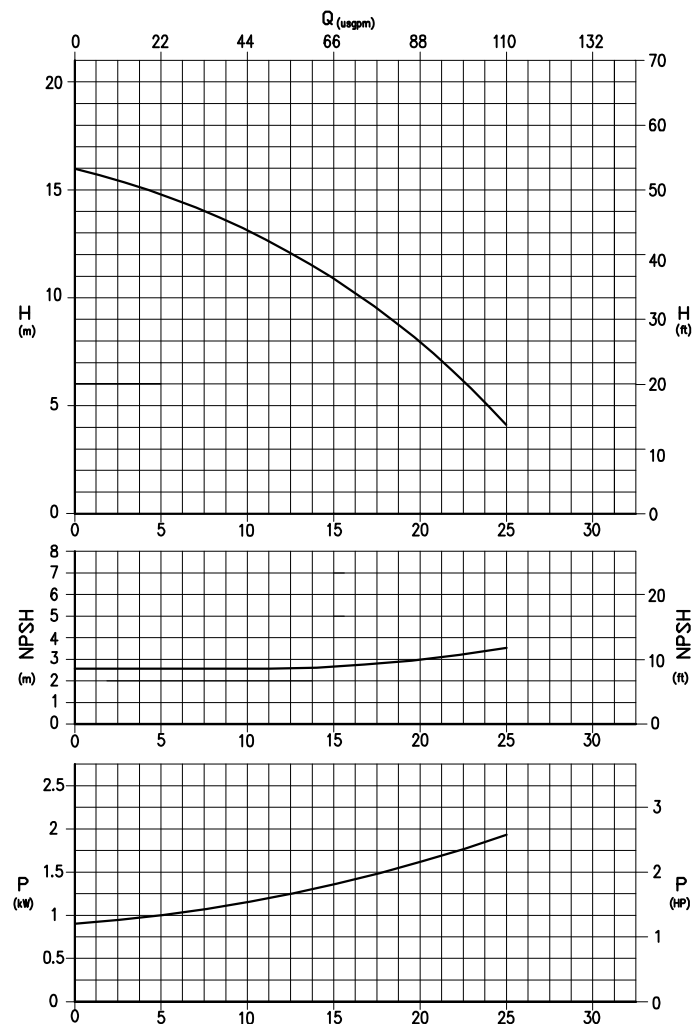

Q (m³/h)

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

DIMENSIONS/DIMENSIONI D'INGOMBRO

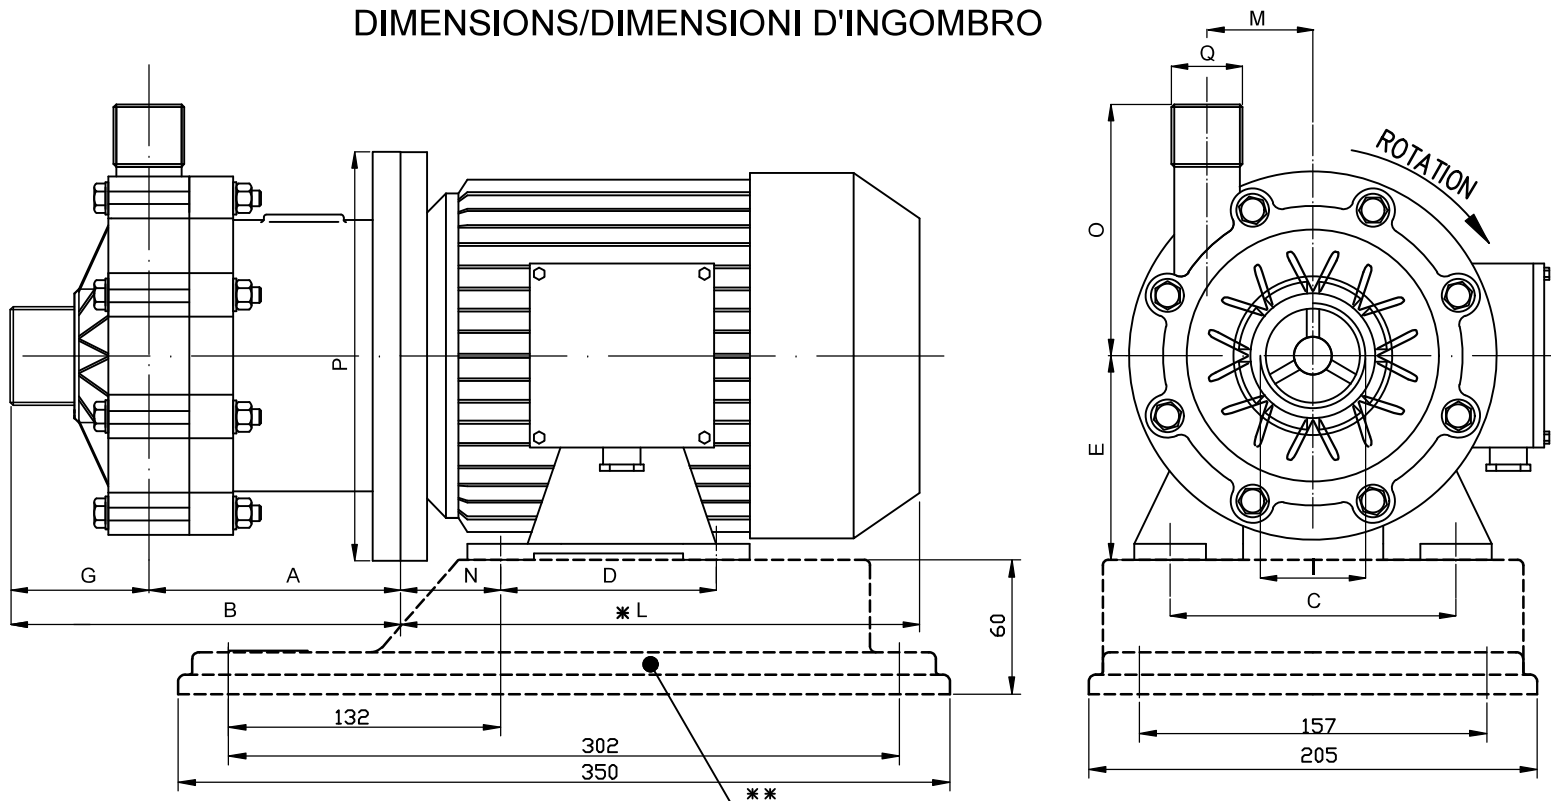


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -											
			A	B	C	D	E	G	I	*L	M	N	O	P
HCO 120	90 S	1.5	209	290	140	100	90	91	2 1/2" MALE	262	66	56	140	200
HCO 120	90 L	2.2	209	290	140	125	90	91	2 1/2" MALE	287	66	56	140	200

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

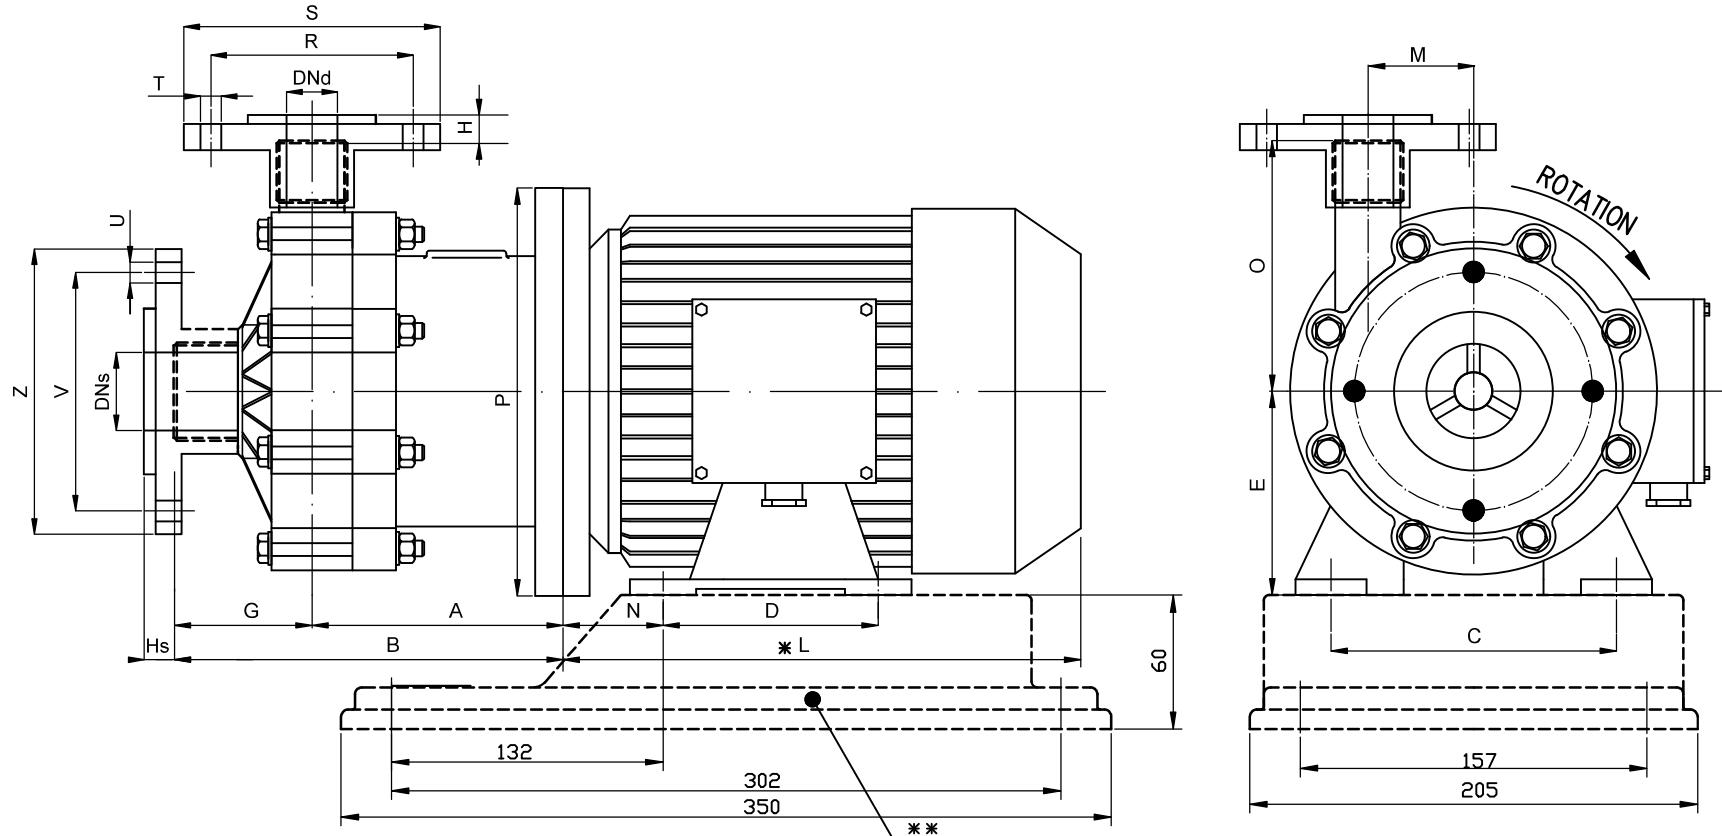

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												FLANGES DIN PN 10-DIMENSIONS - mm -								
			A	B	C	D	E	Hs	G	H	*L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 120	90 S	1.5	209	290	140	100	90	10	91	13	262	66	56	140	200	125	168	18	18	145	188	65	50
HCO 120	90 L	2.2	209	290	140	125	90	10	91	13	287	66	56	140	200	125	168	18	18	145	188	65	50

* Different according to the manufacturer / Diverso a seconda del fornitore


** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	30 m ³ /h
Max head/Prevalenza massima:	18 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffietto in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

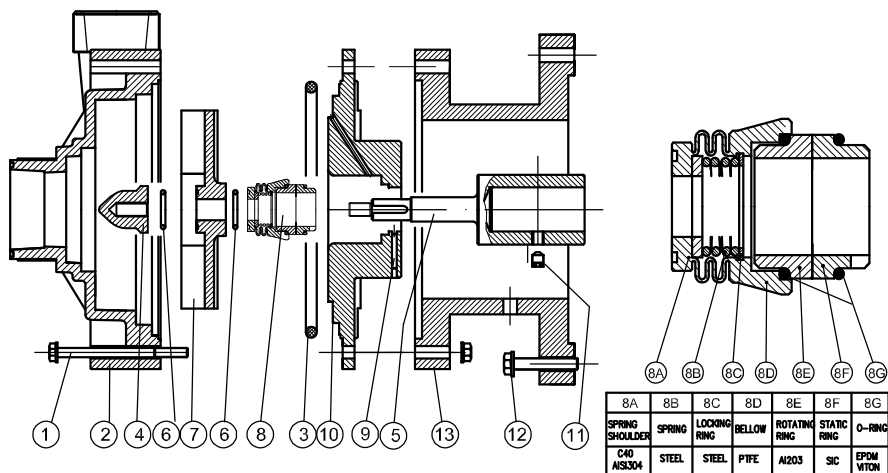


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 ALSI316	EPDM VITON	PP-PVDF	●	ALSI304	PP+GF PVDF+CF	ALSI304	ALSI304	PP

CURVES/CURVE 50HZ-2900 RPM

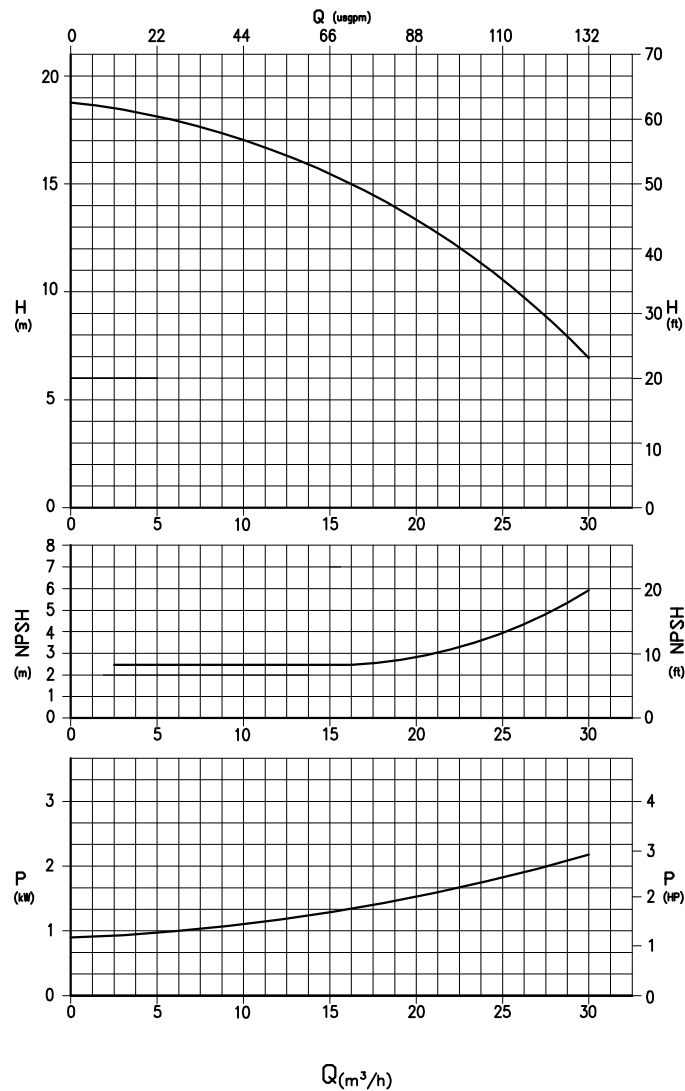

DIMENSIONS/DIMENSIONI D'INGOMBRO

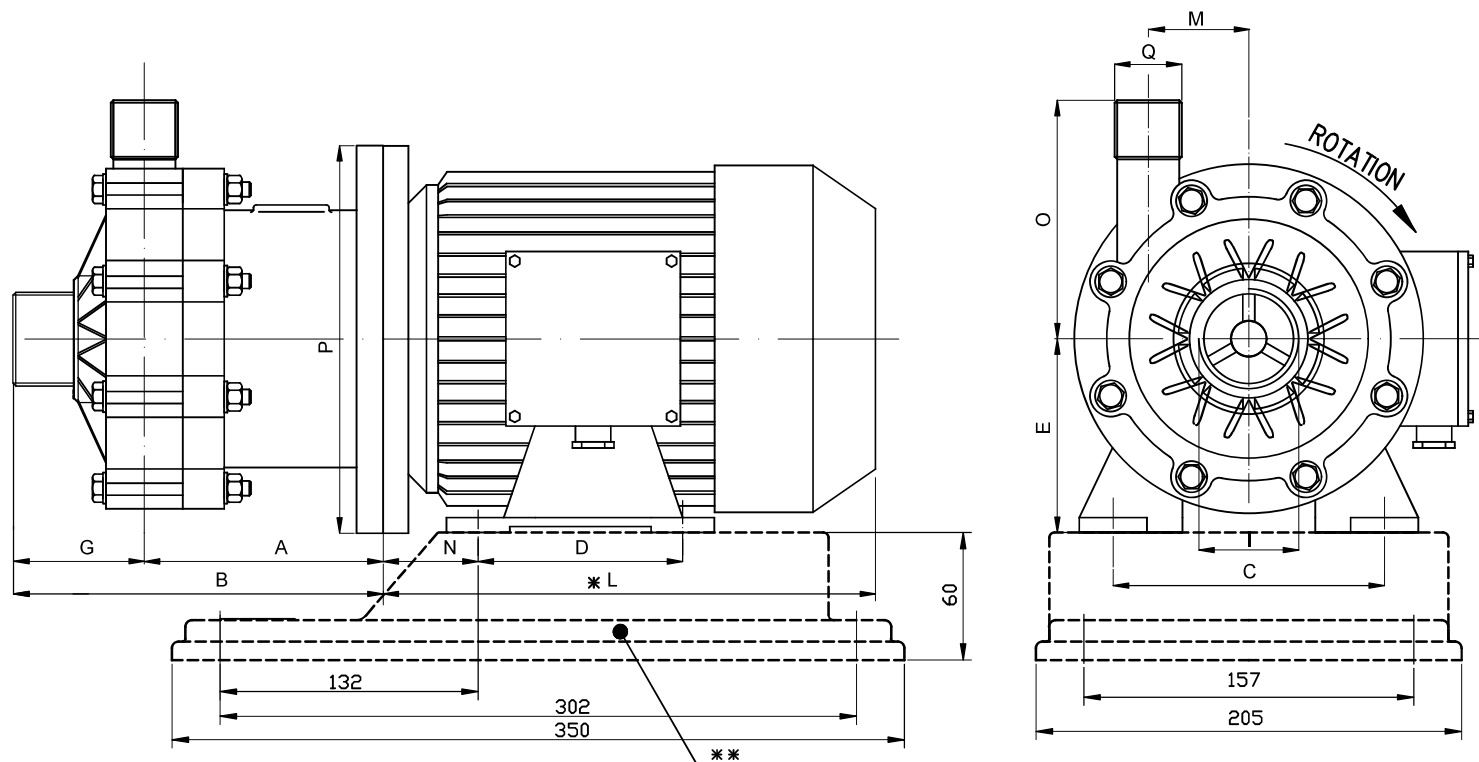


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HCO 130	G 90 L	2.2	209	290	140	125	90	91	2 1/2" MALE	280	66	56	140	200	2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

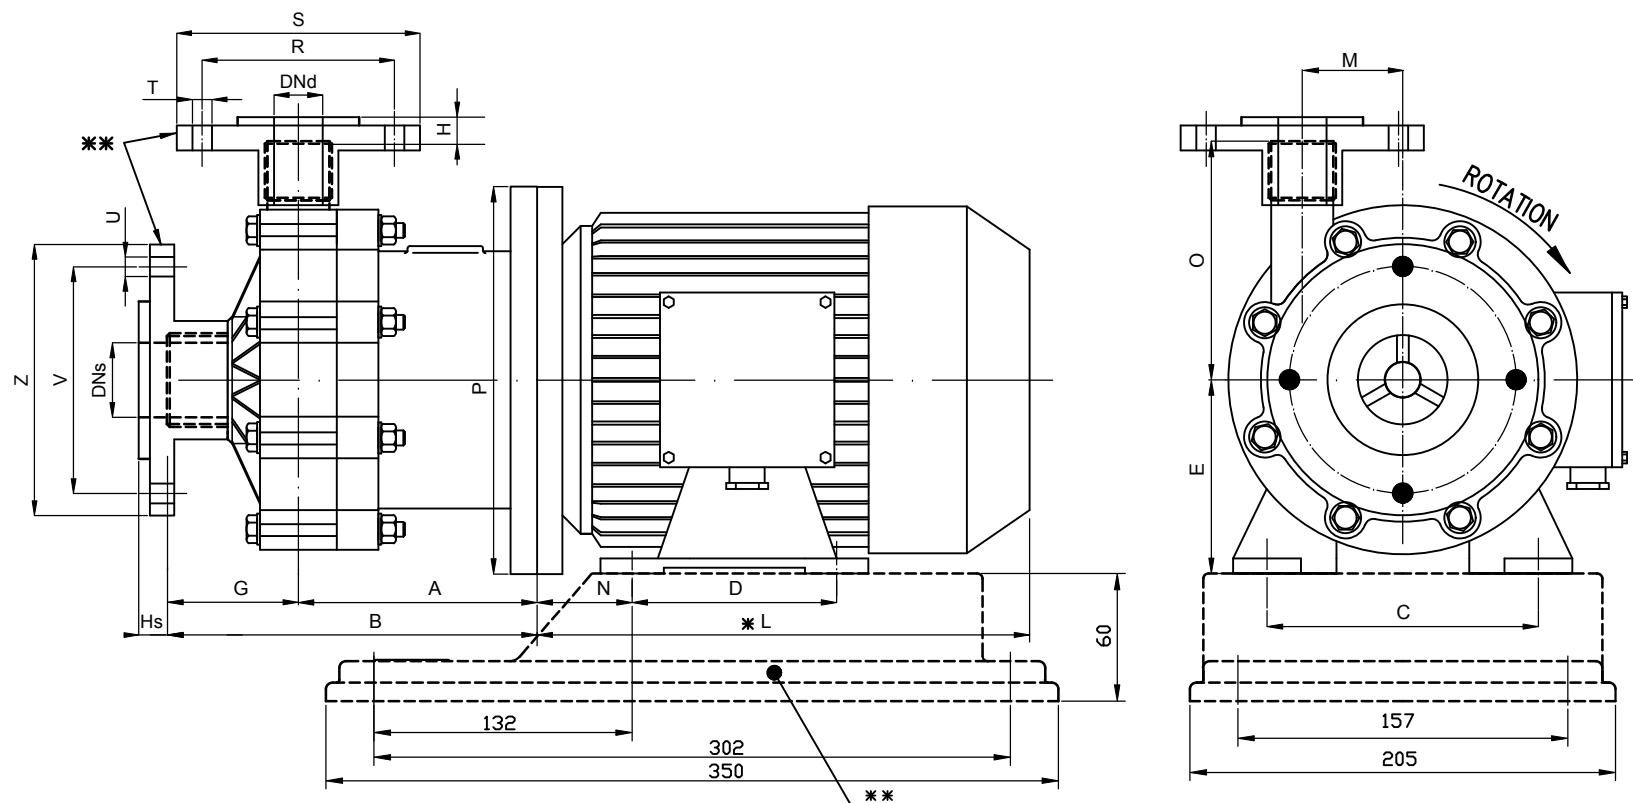


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -													FLANGES DIN PN 10-DIMENSIONS - mm -							
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 130	G 90 L	2.2	209	290	140	125	90	10	91	13	280	66	56	140	200	125	168	18	18	145	188	65	50

※ Different according to the manufacturer / Diverso a seconda del fornitore
 ※※ OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio

FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	40 m ³ /h
Max head/Prevalenza massima:	22 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffiello in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

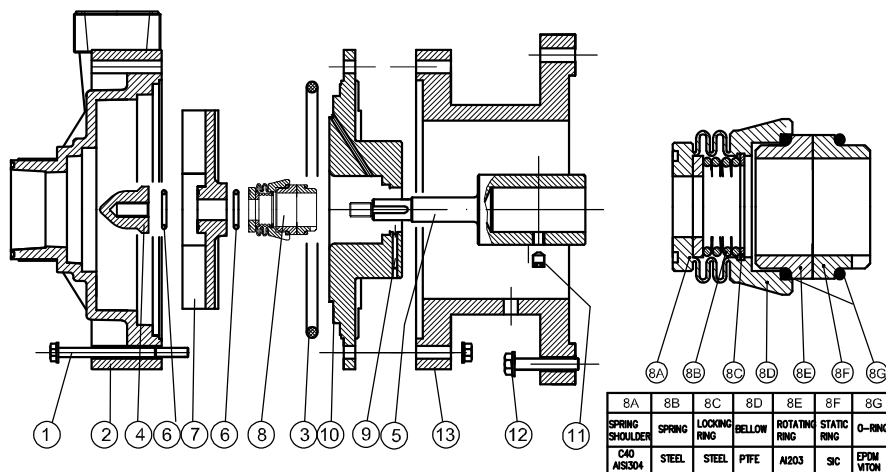

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART. DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 ALSI316	EPDM VITON	PP-PVDF	●	ALSI304	PP+GF PVDF+CF	ALSI304	ALSI304	PP


CURVES/CURVE 50HZ-2900 RPM

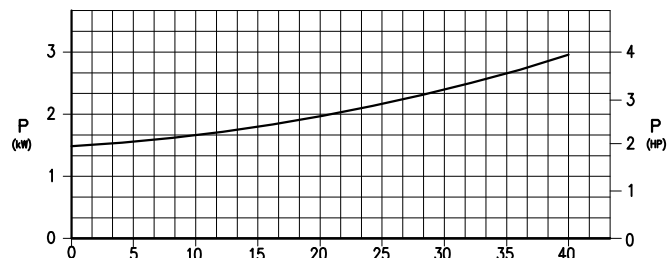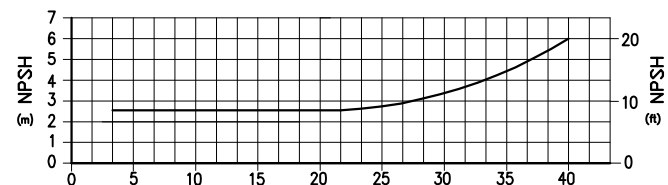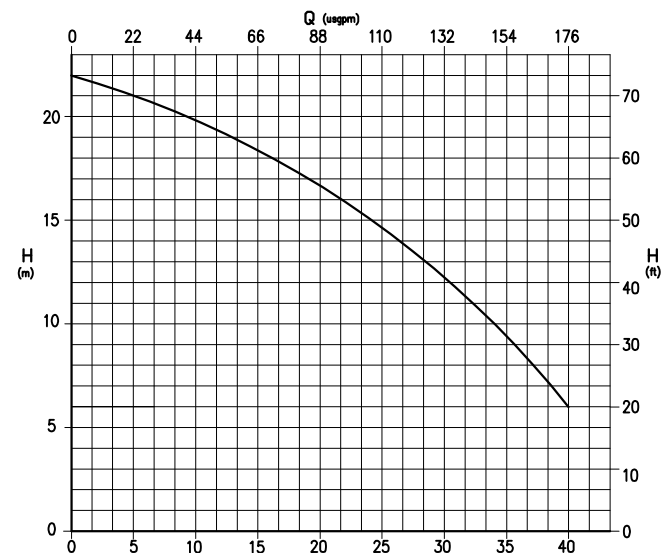

Q (m³/h)

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso


DIMENSIONS/DIMENSIONI D'INGOMBRO

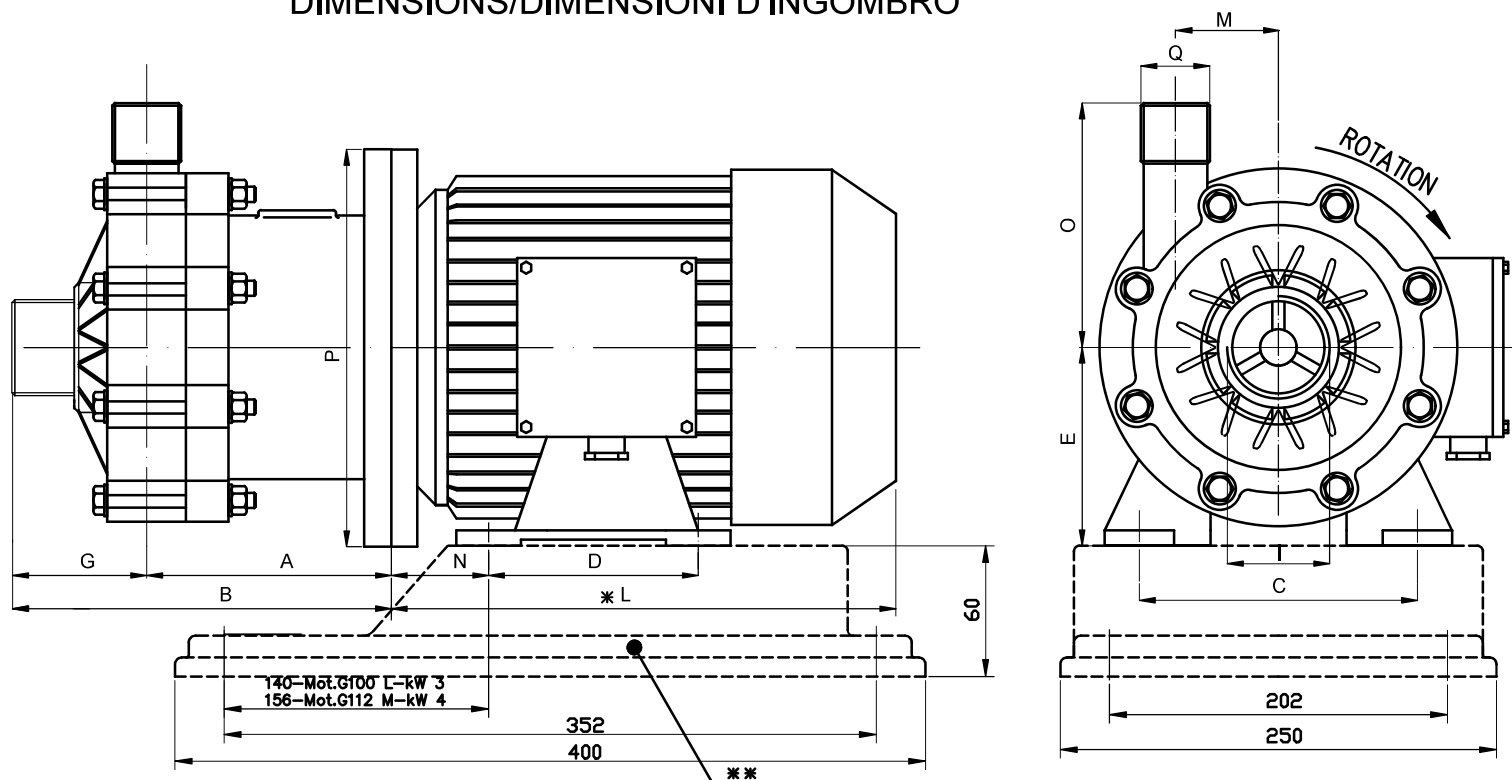

PUMP TYPE	MOTOR FLANGE B3—B5	POT. Kw	DIMENSIONS — mm —												
			A	B	C	D	E	G	I	✱L	M	N	O	P	Q
HCO 140	G 100 L	3	219	310	160	140	100	91	2 1/2" MALE	315	66	63	140	250	2" MALE
HCO 140	G 112 M	4	219	310	190	140	112	91	2 1/2" MALE	325	66	70	140	250	2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio - Flanges/Flange

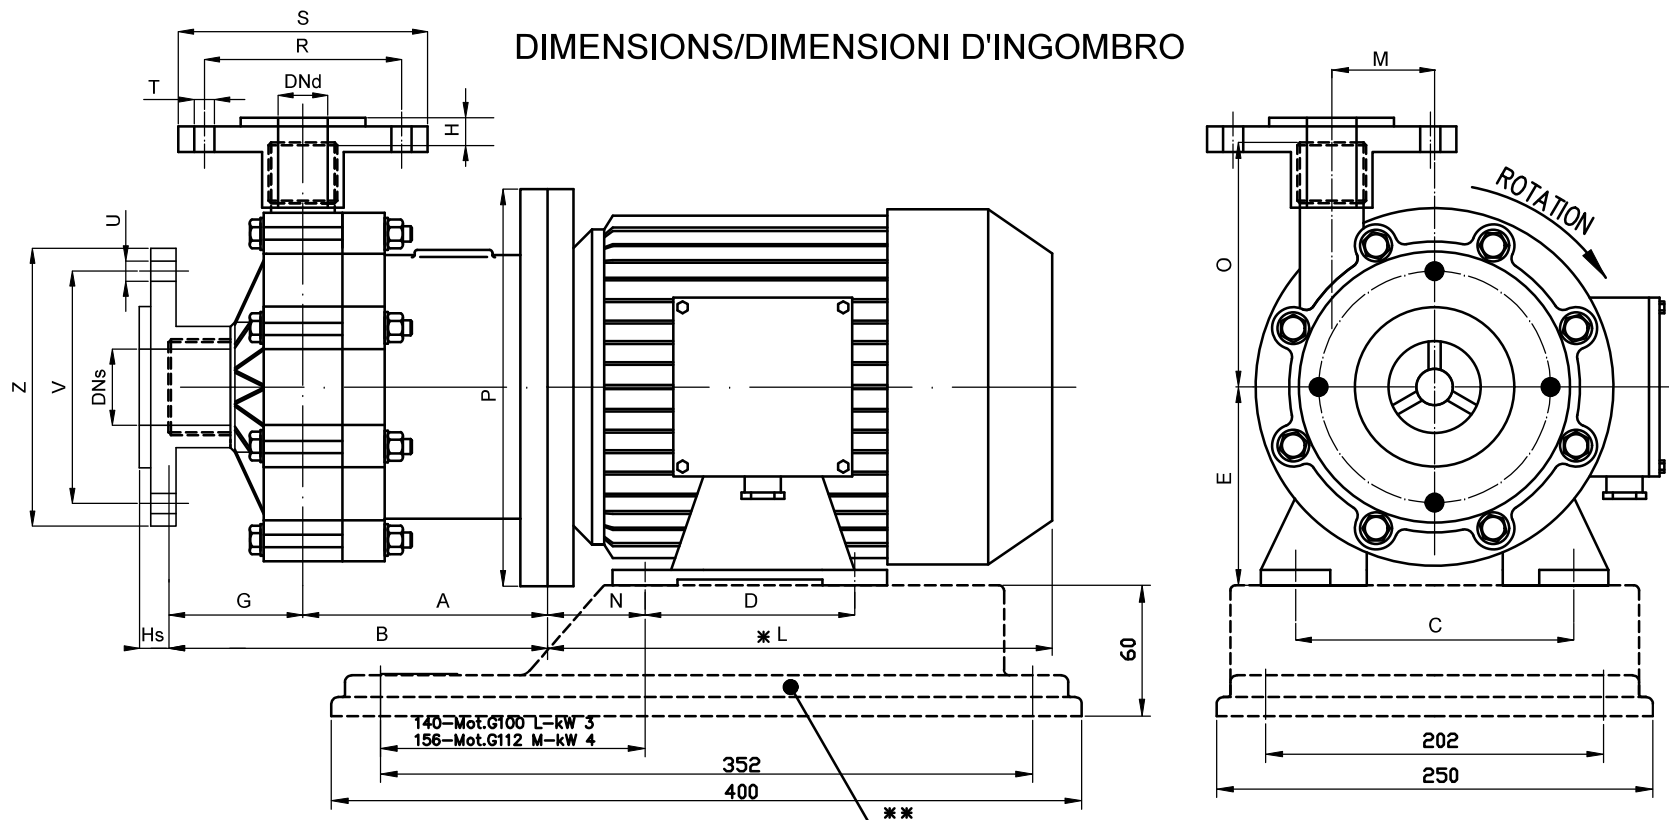

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -													FLANGES DIN PN 10-DIMENSIONS - mm -							
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 140	G 100 L	3	219	310	160	140	100	10	91	13	315	66	63	140	250	125	168	18	18	145	188	65	50
HCO 140	G 112 M	4	219	310	190	140	112	10	91	13	325	66	70	140	250	125	168	18	18	145	188	65	50


* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL-UPON REQUEST/SU RICHIESTA: Baseplate/Piede d'appoggio

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	45 m ³ /h
Max head/Prevalenza massima:	26m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffietto in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

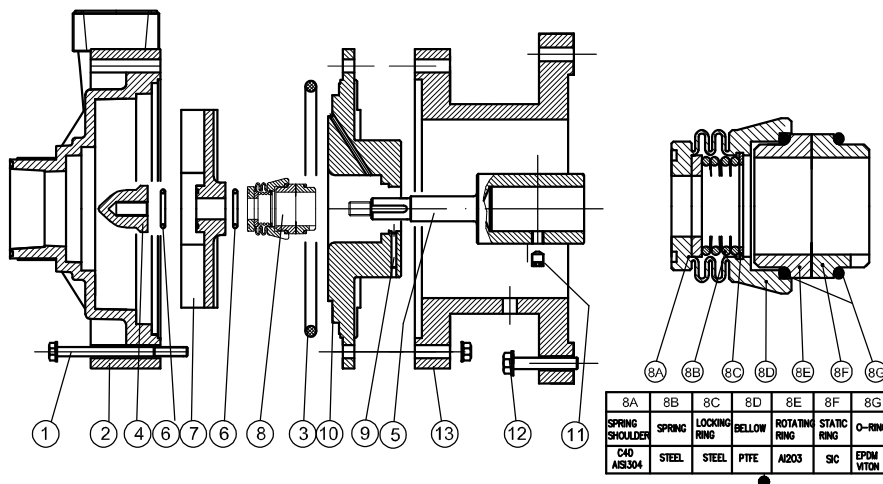


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	AI31304	PP+CF PVDF+CF	EPDM VITON	PP-PVDF	C40 AI31316	EPDM VITON	PP-PVDF	●	AI31304	PP+CF PVDF+CF	AI31304	AI31304	PP

CURVES/CURVE 50HZ-2900 RPM

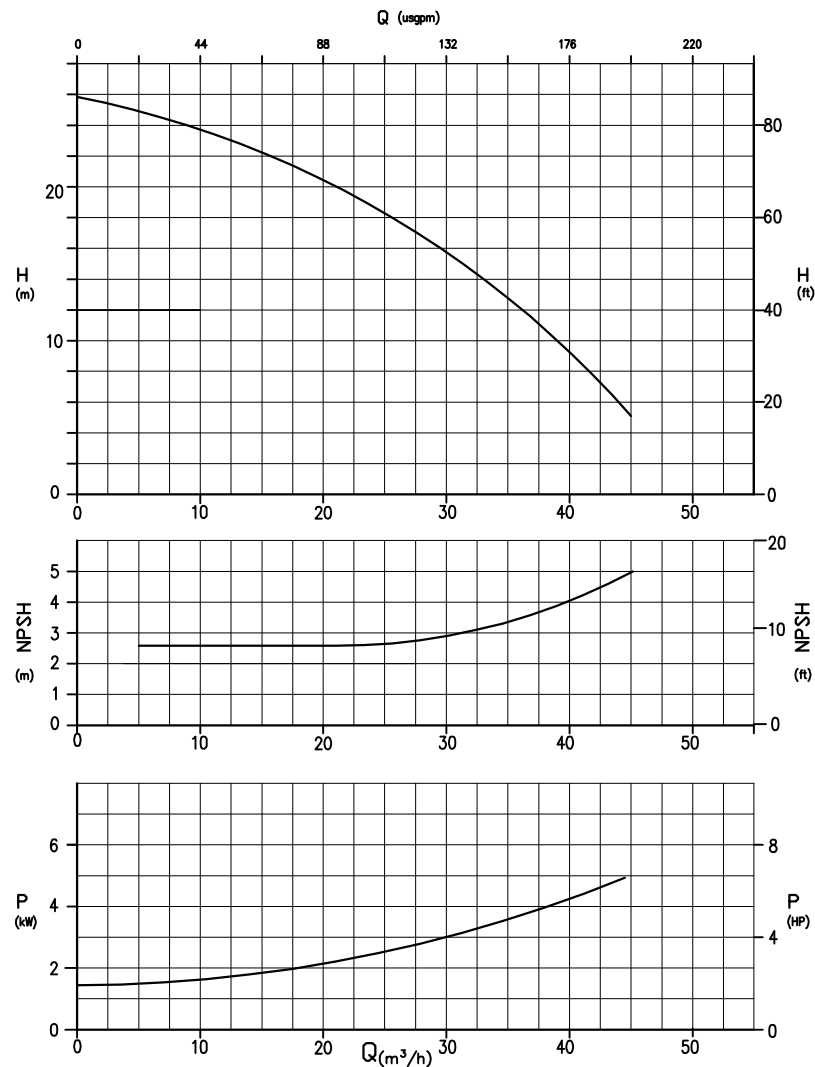

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso


DIMENSIONS/DIMENSIONI D'INGOMBRO

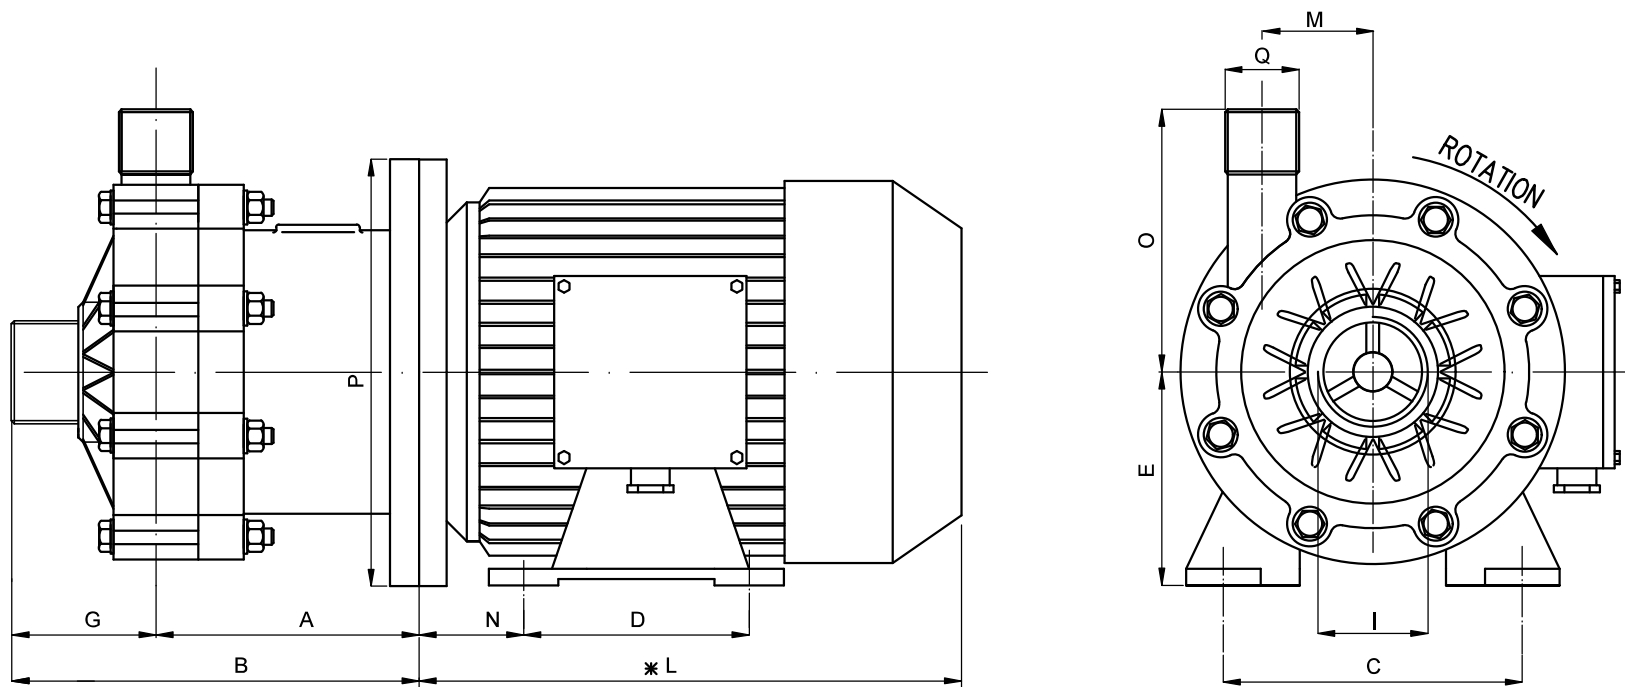

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	✱L	M	N	O	P	Q
HCO 150	132 SA	5.5	184	275	216	140	132	91	3" MALE	380	82.5	89	170	300	2 1/2" MALE
HCO 150	132 SB	7.5	184	275	216	140	132	91	3" MALE	380	82.5	89	170	300	2 1/2" MALE
HCO 150	132 MA	9.2	184	275	216	178	132	91	3" MALE	418	82.5	89	170	300	2 1/2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore
 ** OPTIONAL-UPON REQUEST/SU RICHIESTA: Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

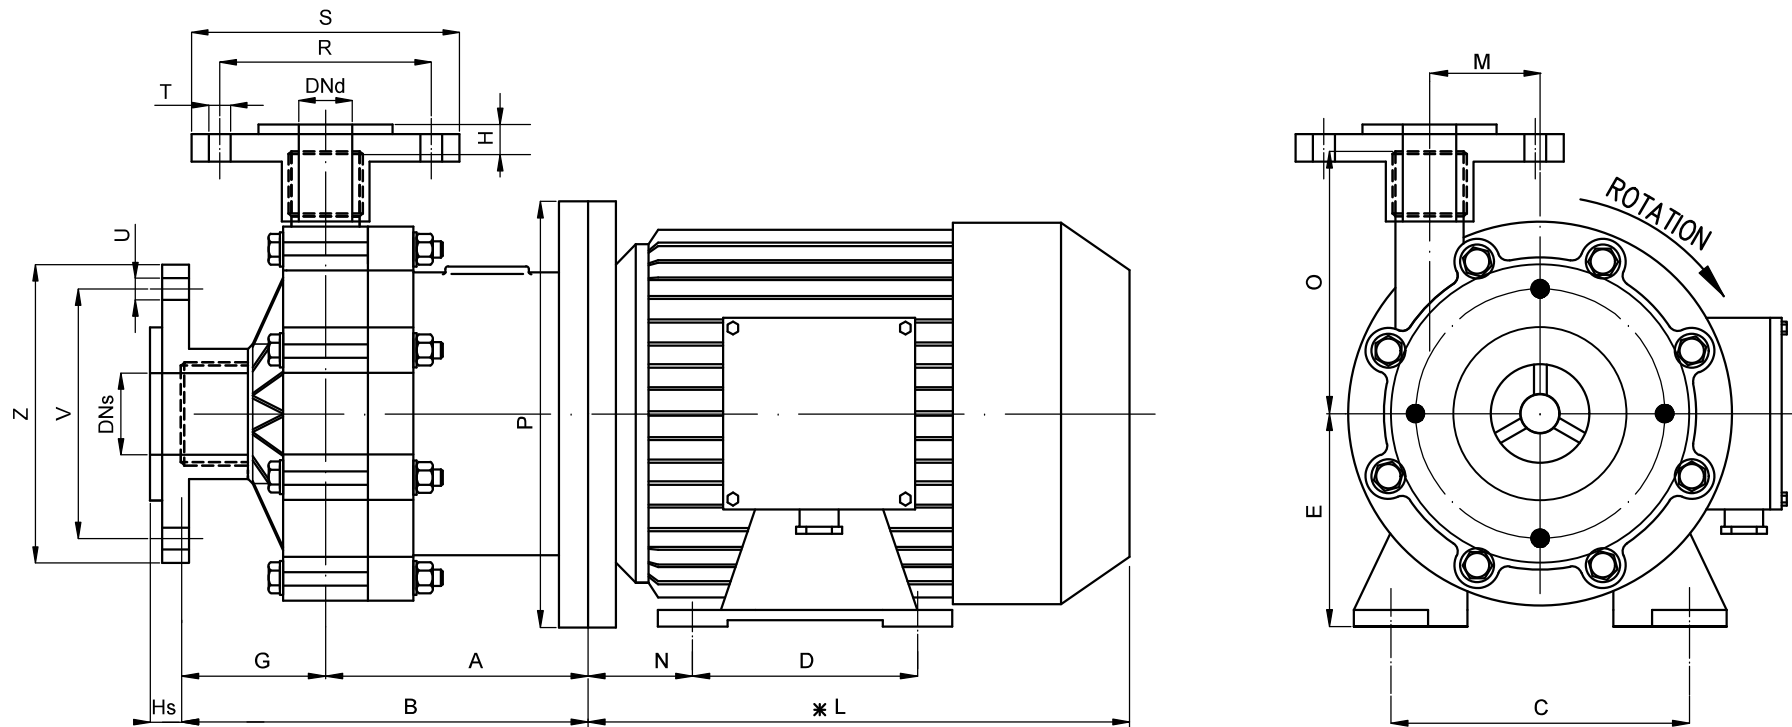


PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –													FLANGES DIN PN 10–DIMENSIONS – mm –									
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd		
HCO 150	132 SA	5.5	184	275	216	140	132	10	91	10	380	82.5	89	170	300	145	188	18	18	160	203	80	65		
HCO 150	132 SB	7.5	184	275	216	140	132	10	91	10	380	82.5	89	170	300	145	188	18	18	160	203	80	65		
HCO 150	132 MA	9.2	184	275	216	178	132	10	91	10	418	82.5	89	170	300	145	188	18	18	160	203	80	65		

* Different according to the manufacturer / Diverso a seconda del fornitore

FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	50 m ³ /h
Max head/Prevalenza massima:	29 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffietto in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

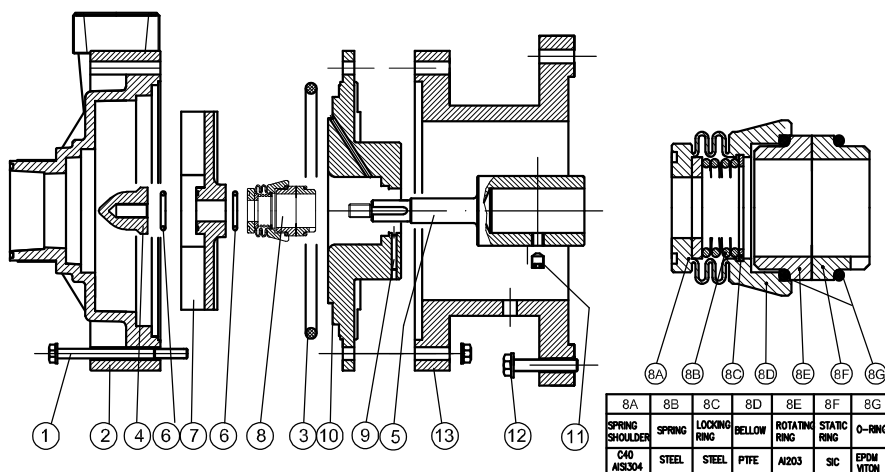

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 ALSI316	EPDM VITON	PP-PVDF	●	ALSI304	PP+GF PVDF+CF	ALSI304	ALSI304	PP


CURVES/CURVE 50HZ-2900 RPM

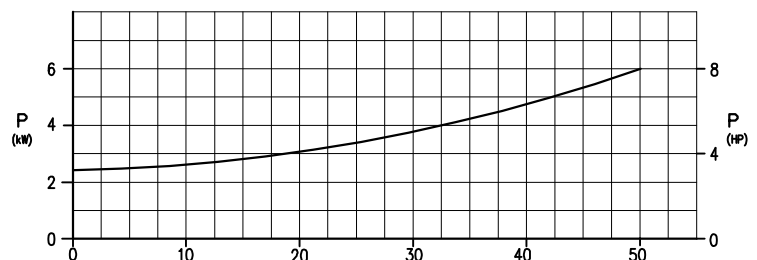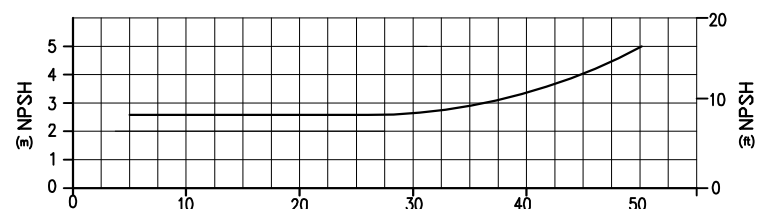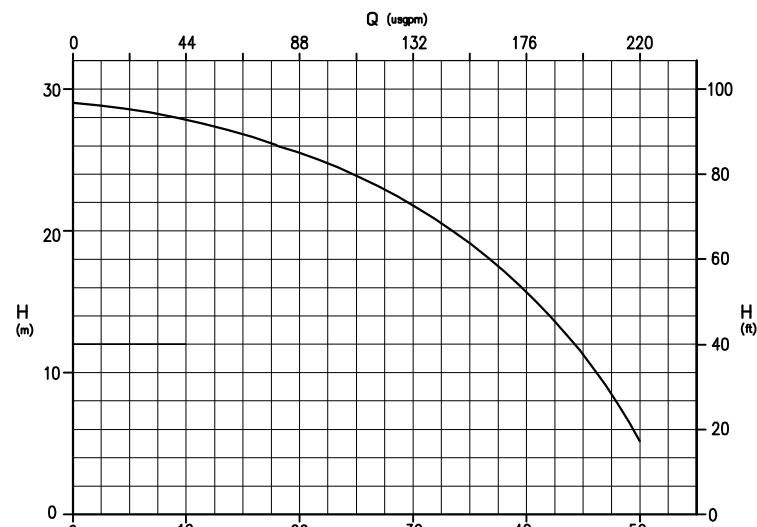

Q (m³/h)

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

DIMENSIONS/DIMENSIONI D'INGOMBRO


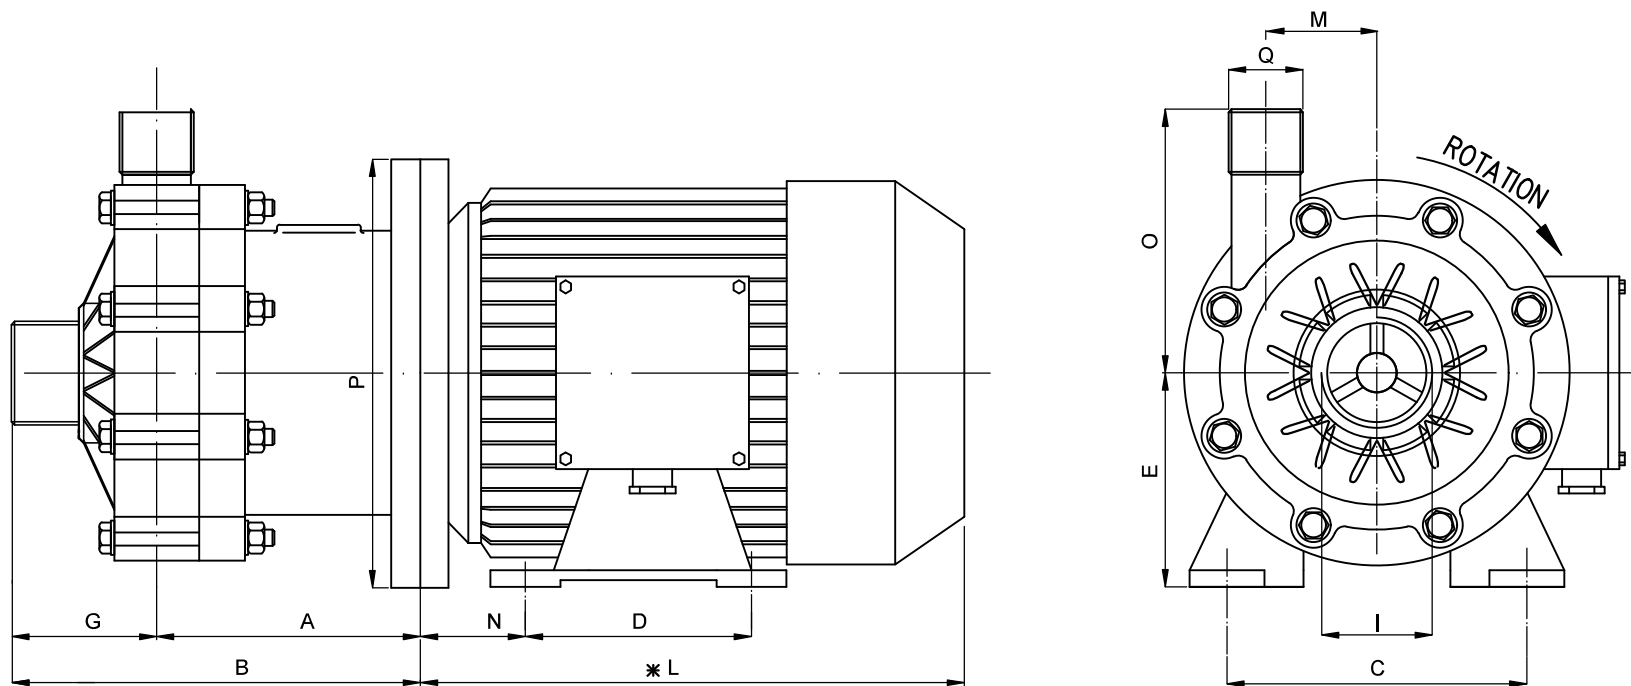


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HCO 155	132 SA	5.5	184	275	216	140	132	91	3" MALE	380	82.5	89	170	300	2 1/2" MALE
HCO 155	132 SB	7.5	184	275	216	140	132	91	3" MALE	380	82.5	89	170	300	2 1/2" MALE
HCO 155	132 MA	9.2	184	275	216	178	132	91	3" MALE	418	82.5	89	170	300	2 1/2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore
 ** OPTIONAL-UPON REQUEST/SU RICHIESTA: Flanges/Flange

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

DIMENSIONS/DIMENSIONI D'INGOMBRO

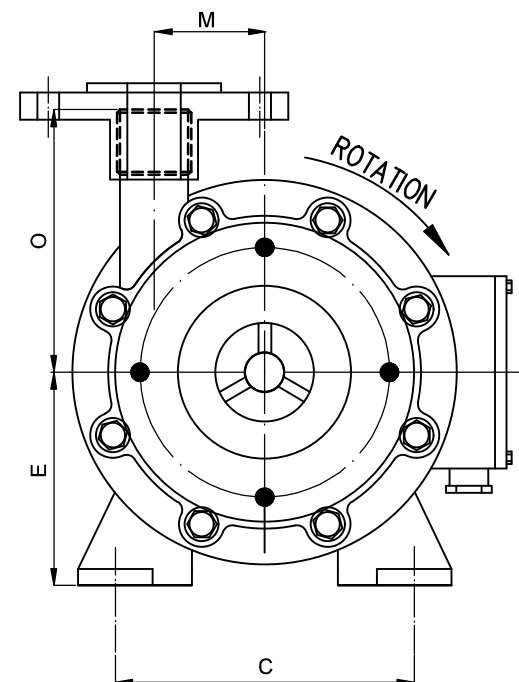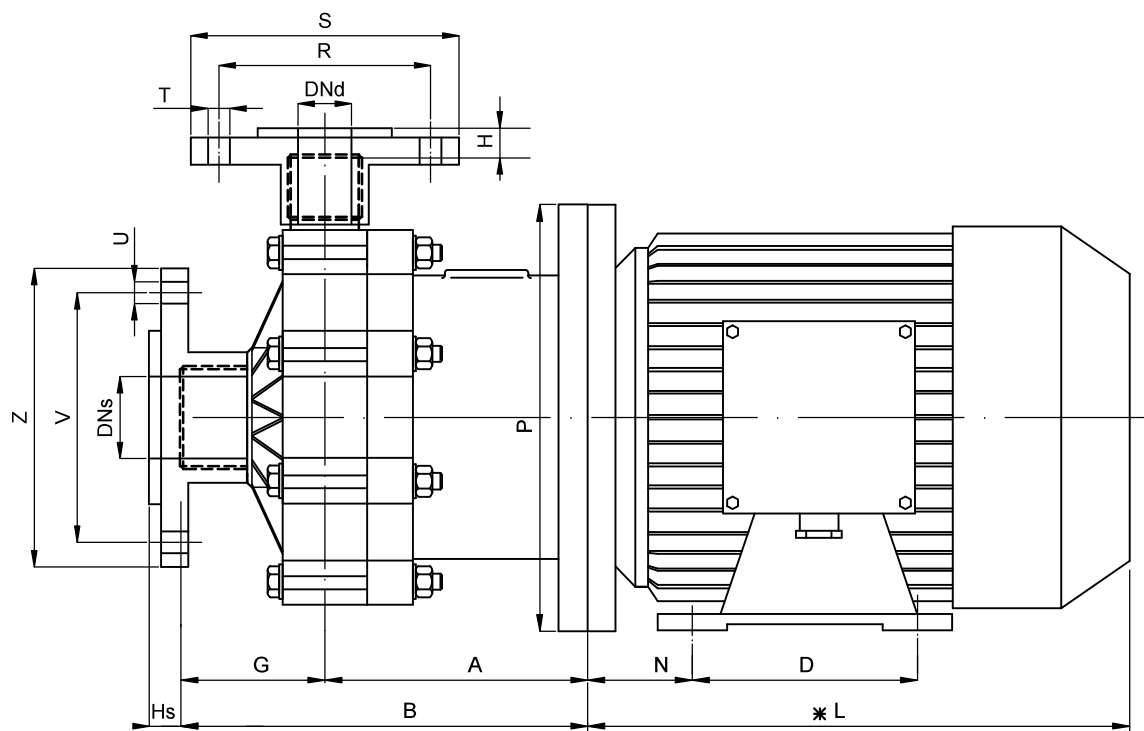

PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –													FLANGES DIN PN 10–DIMENSIONS – mm –									
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd		
HCO 155	132 SA	5.5	184	275	216	140	132	10	91	10	380	82.5	89	170	300	145	188	18	18	160	203	80	65		
HCO 155	132 SB	7.5	184	275	216	140	132	10	91	10	380	82.5	89	170	300	145	188	18	18	160	203	80	65		
HCO 155	132 MA	9.2	184	275	216	178	132	10	91	10	418	82.5	89	170	300	145	188	18	18	160	203	80	65		


* Different according to the manufacturer / Diverso a seconda del fornitore

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	55 m ³ /h
Max head/Prevalenza massima:	36 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffiello in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

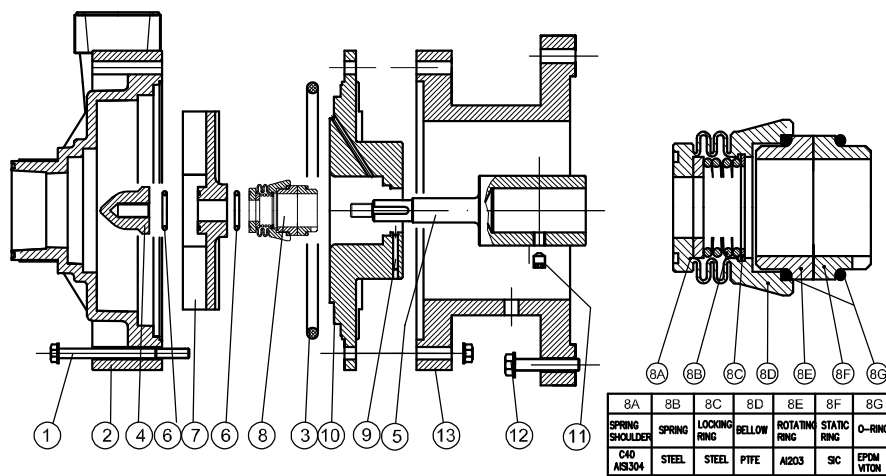


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	AI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 AI316	EPDM VITON	PP-PVDF	●	AI304	PP+GF PVDF+CF	AI304	AI304	PP

CURVES/CURVE 50HZ-2900 RPM

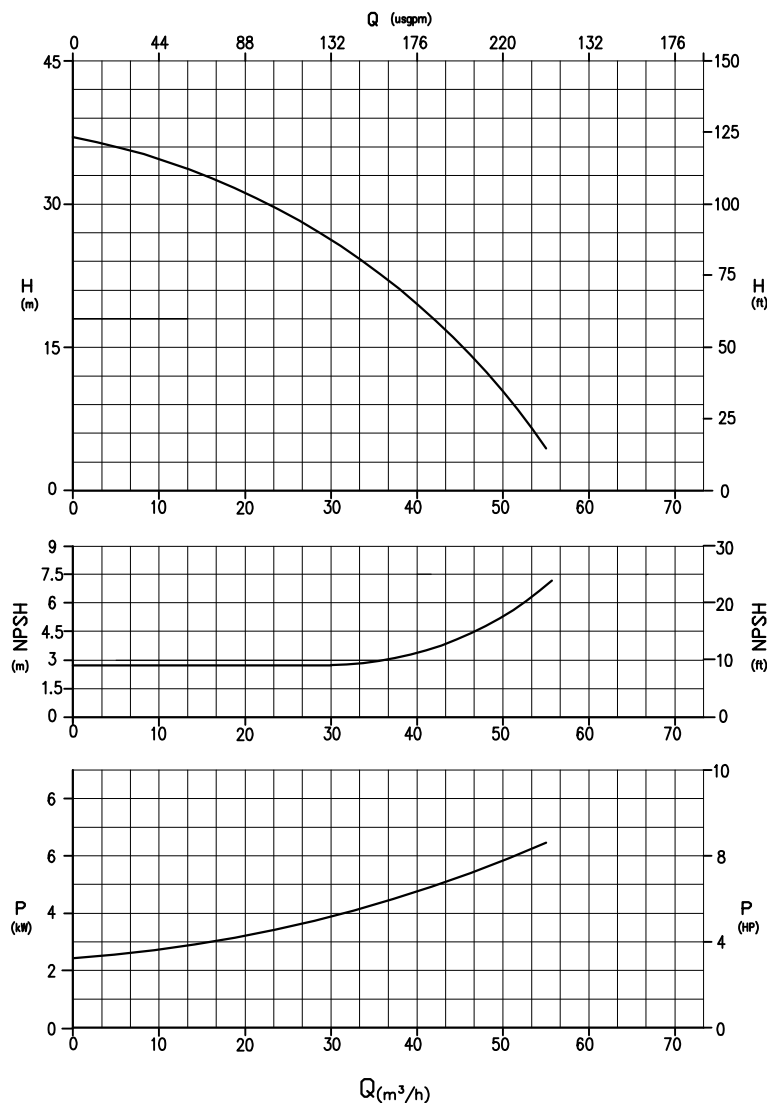

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso



DIMENSIONS/DIMENSIONI D'INGOMBRO

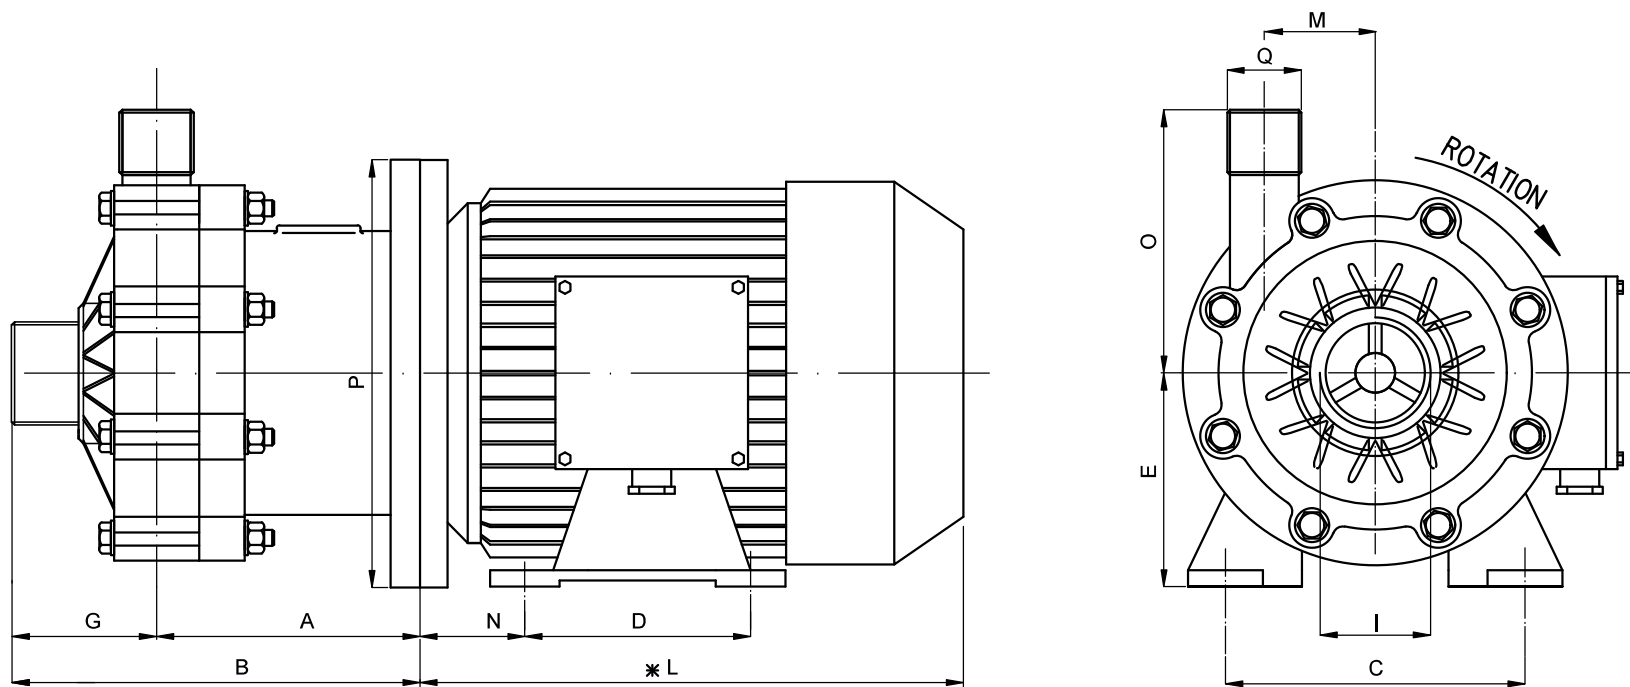

PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HCO 160	132 SB	7.5	184	275	216	140	132	91	3" MALE	380	82.5	89	170	300	2 1/2" MALE
HCO 160	132 MA	9.2	184	275	216	178	132	91	3" MALE	418	82.5	89	170	300	2 1/2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore
 ** OPTIONAL-UPON REQUEST/SU RICHIESTA: Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

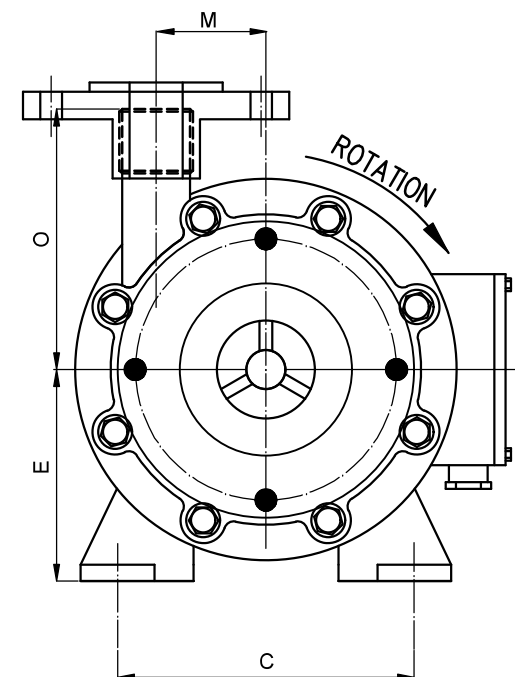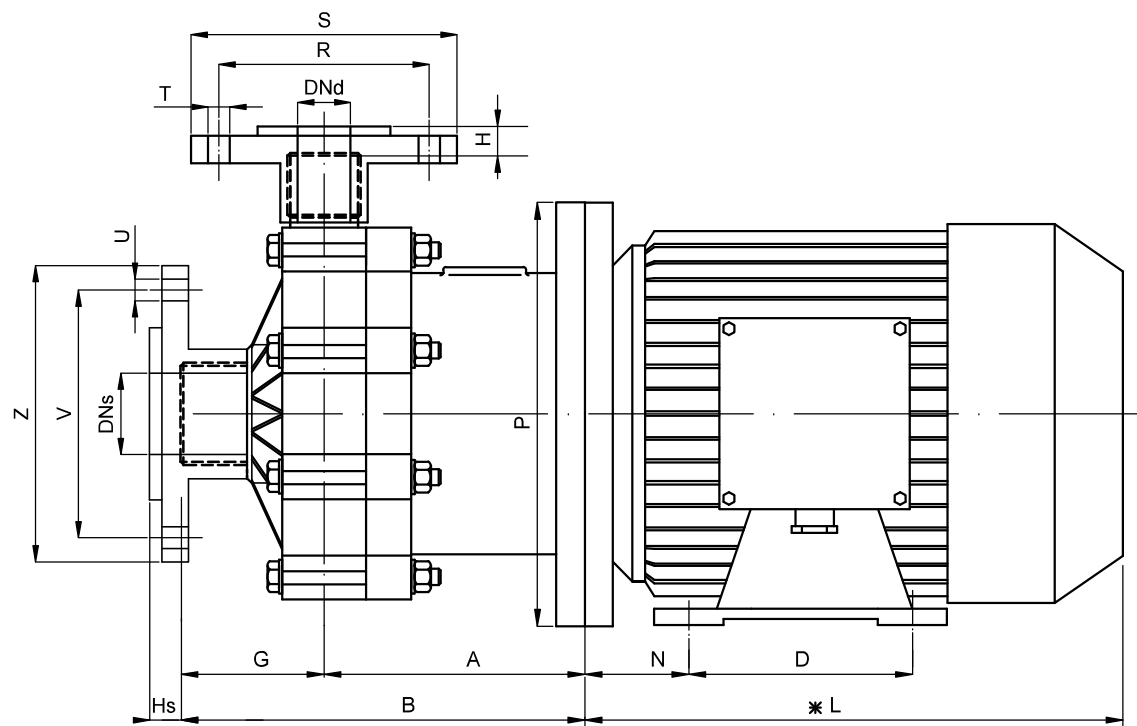


PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –													FLANGES DIN PN 10–DIMENSIONS – mm –								
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd	
HCO 160	132 SB	7.5	184	275	216	140	132	10	91	10	380	82.5	89	170	300	145	188	18	18	160	203	80	65	
HCO 160	132 MA	9.2	184	275	216	178	132	10	91	10	418	82.5	89	170	300	145	188	18	18	160	203	80	65	

* Different according to the manufacturer / Diverso a seconda del fornitore

FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	58 m ³ /h
Max head/Prevalenza massima:	38 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffietto in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

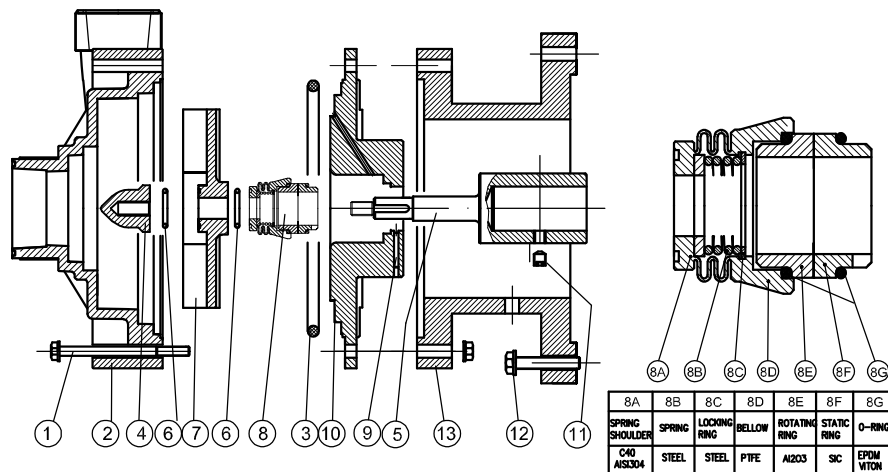

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PIN	COVER	GRUB SCREW	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 ALSI316	EPDM VITON	PP-PVDF	●	ALSI304	PP+GF PVDF+CF	ALSI304	ALSI304	PP


CURVES/CURVE 50HZ-2900 RPM

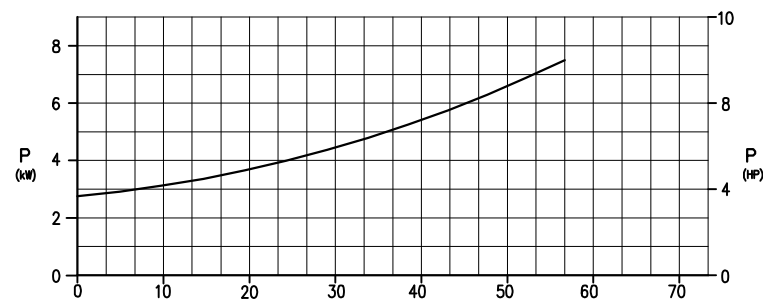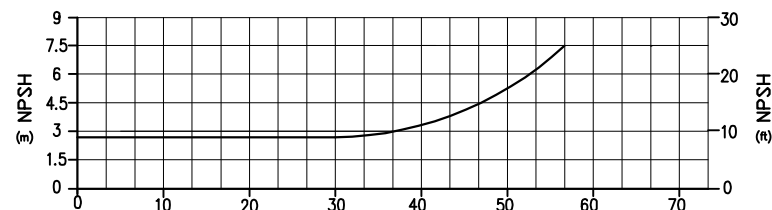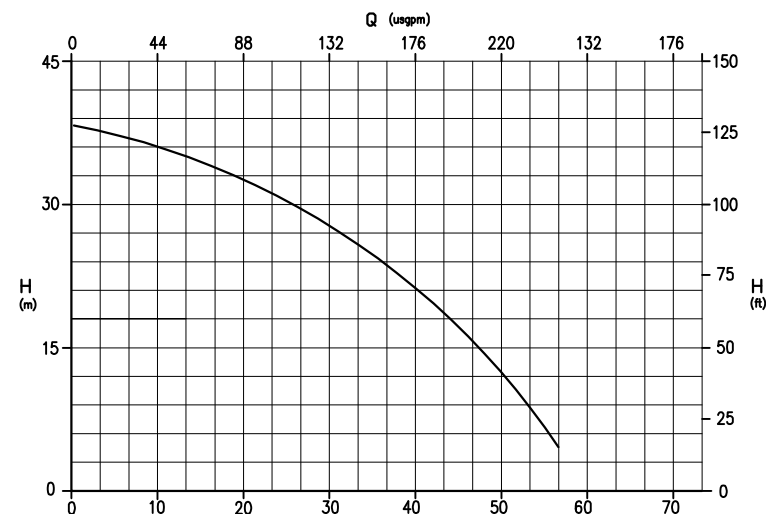

Q (m³/h)

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso



DIMENSIONS/DIMENSIONI D'INGOMBRO

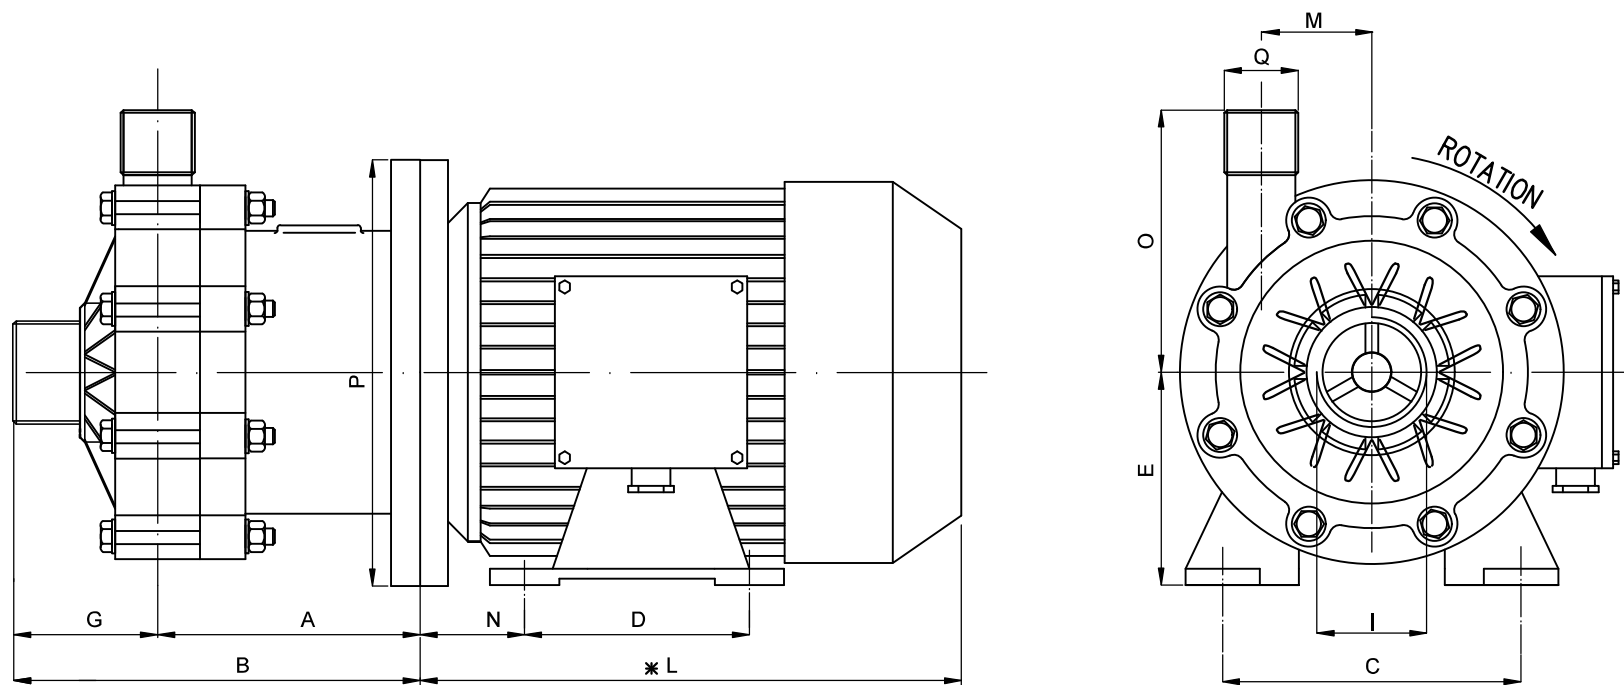

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -												
			A	B	C	D	E	G	I	*L	M	N	O	P	Q
HCO 170	132 SB	7.5	184	275	216	140	132	91	3" MALE	380	82.5	89	170	300	2 1/2" MALE
HCO 170	132 MA	9.2	184	275	216	178	132	91	3" MALE	418	82.5	89	170	300	2 1/2" MALE

* Different according to the manufacturer / Diverso a seconda del fornitore
 ** OPTIONAL-UPON REQUEST/SU RICHIESTA: Flanges/Flange

DIMENSIONS/DIMENSIONI D'INGOMBRO

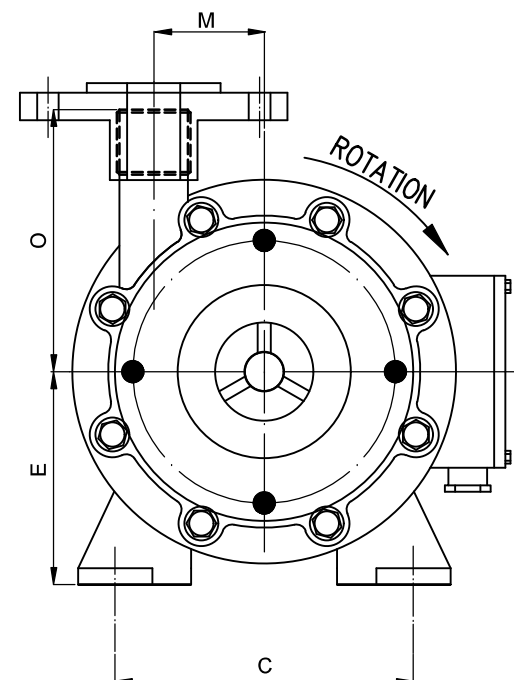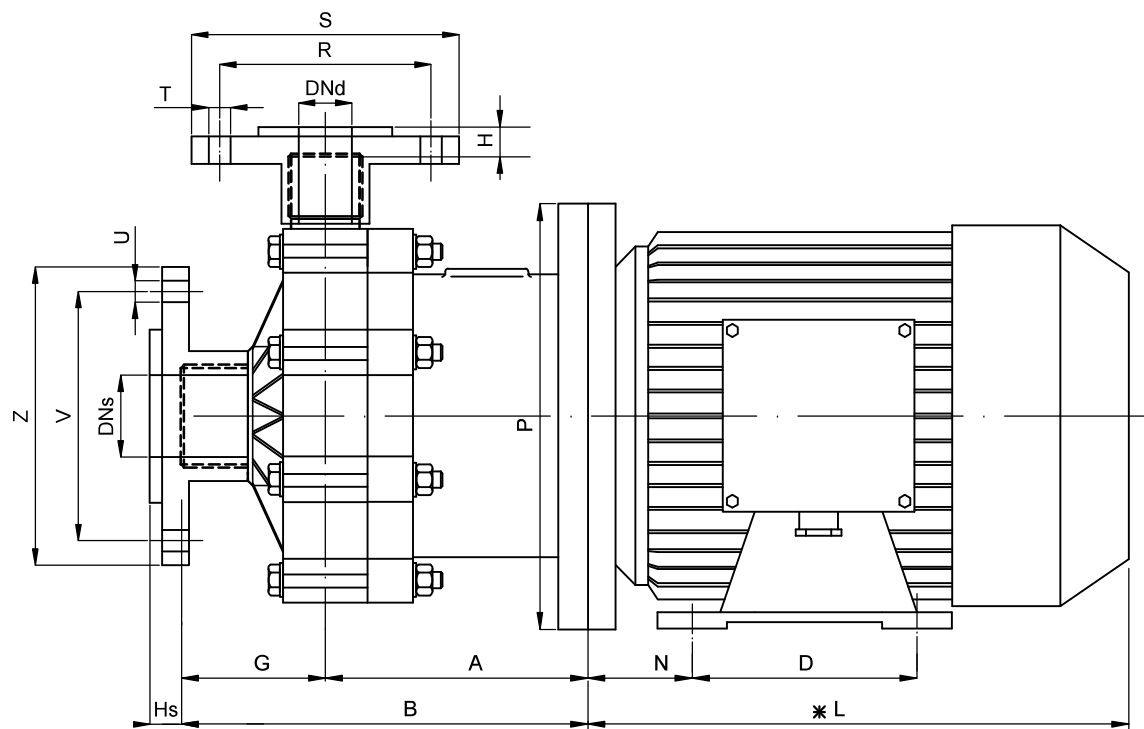


PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –													FLANGES DIN PN 10–DIMENSIONS – mm –									
			A	B	C	D	E	Hs	G	H	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd		
HCO 170	132 SB	7.5	184	275	216	140	132	10	91	10	380	82.5	89	170	300	145	188	18	18	160	203	80	65		
HCO 170	132 MA	9.2	184	275	216	178	132	10	91	10	418	82.5	89	170	300	145	188	18	18	160	203	80	65		

* Different according to the manufacturer / Diverso a seconda del fornitore

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	95 m ³ /h
Max head/Prevalenza massima:	44 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffiello in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI


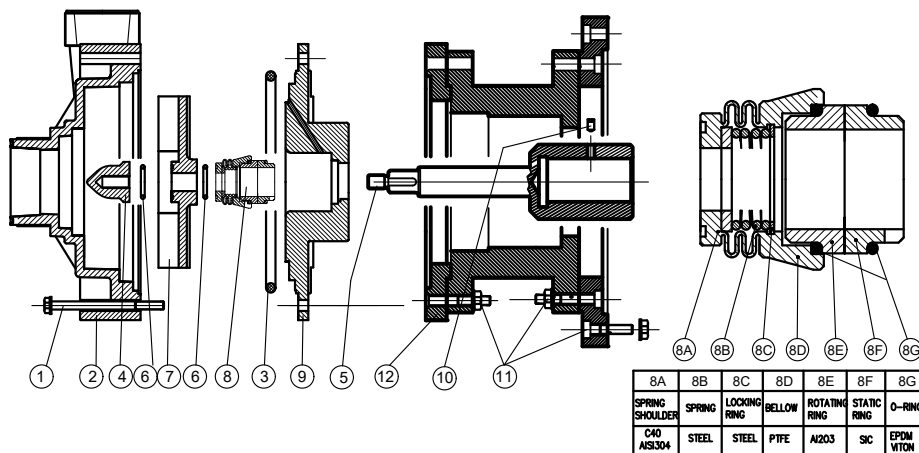


POS.	1	2	3	4	5	6	7	8	9	10	11	12
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	COVER	GRUB SCREW	SET SCREWS	BRACKET + ADAPTER FLANGES
MAT.	AlSi304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 AlSi316	EPDM VITON	PP-PVDF	●	PP+GF PVDF+CF	AlSi304	AlSi304	PP

CURVES/CURVE 50HZ-2900 RPM

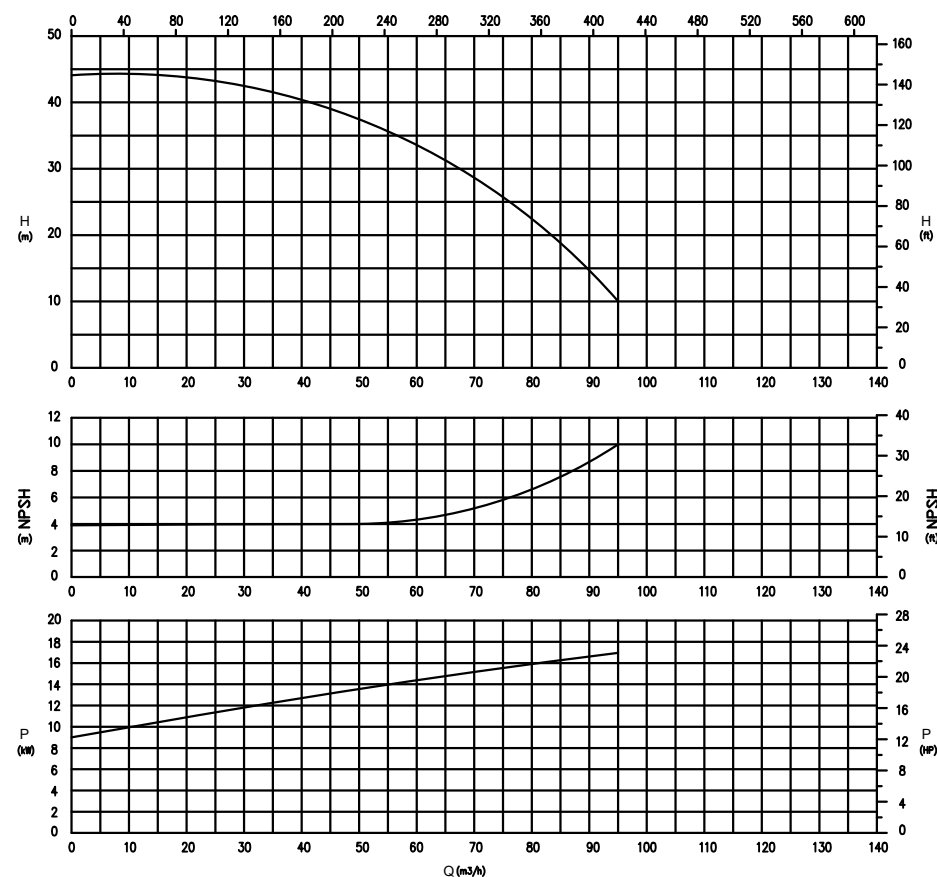

DIMENSIONS/DIMENSIONI D'INGOMBRO

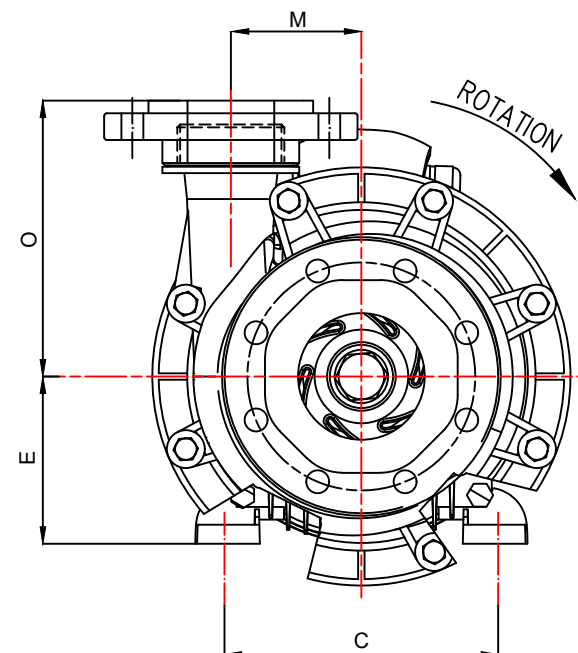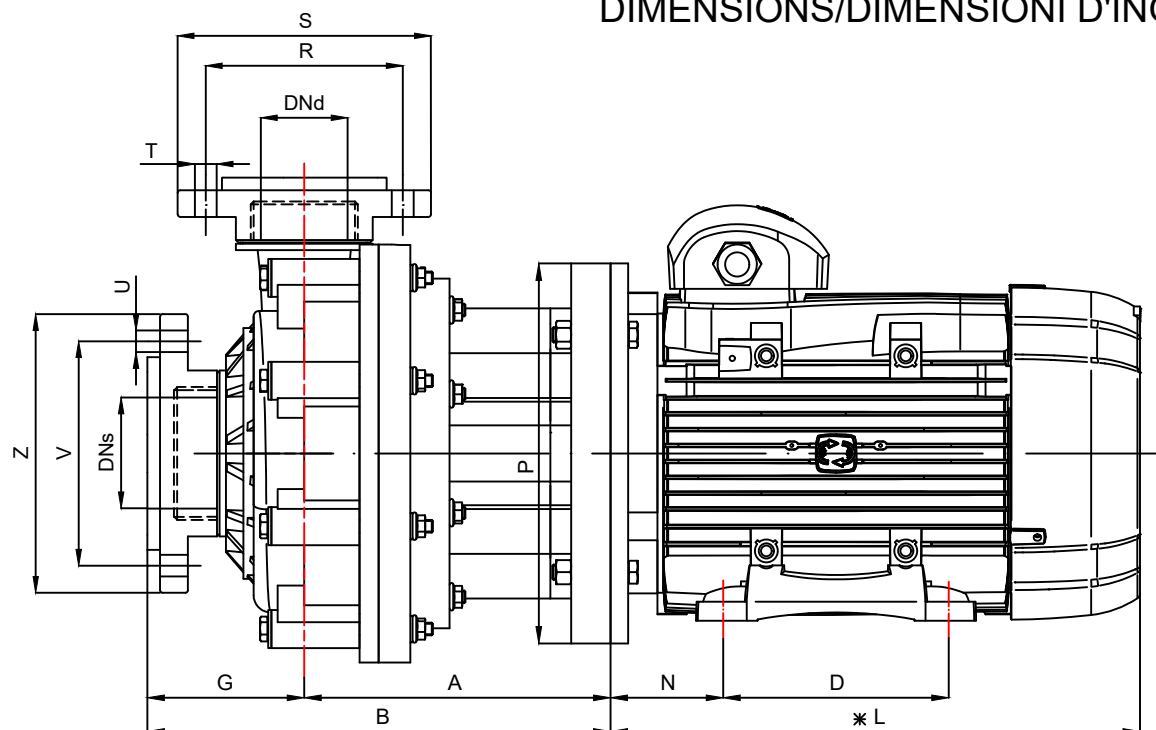


PUMP TYPE	MOTOR FLANGE B3–B5	POT. Kw	DIMENSIONS – mm –											FLANGES DIN PN 10–DIMENSIONS – mm –								
			A	B	C	D	E	G	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd	
HCO 180	160 MA	11	272	397	254	210	160	126	555	103	108	215.5	350	145	185	18	18	160	200	80	65	
	160 MB	15	272	397	254	210	160	126	555	103	108	215.5	350	145	185	18	18	160	200	80	65	
	160 L	18.5	272	397	254	254	160	126	575	103	108	215.5	350	145	185	18	18	160	200	80	65	
	180 M	22	272	397	279	241	180	126	620	103	121	215.5	350	145	185	18	18	160	200	80	65	

* Different according to the manufacturer / Diverso a seconda del fornitore

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	95 m ³ /h
Max head/Prevalenza massima:	44 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Double mechanical seal/ Tenuta meccanica doppia

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

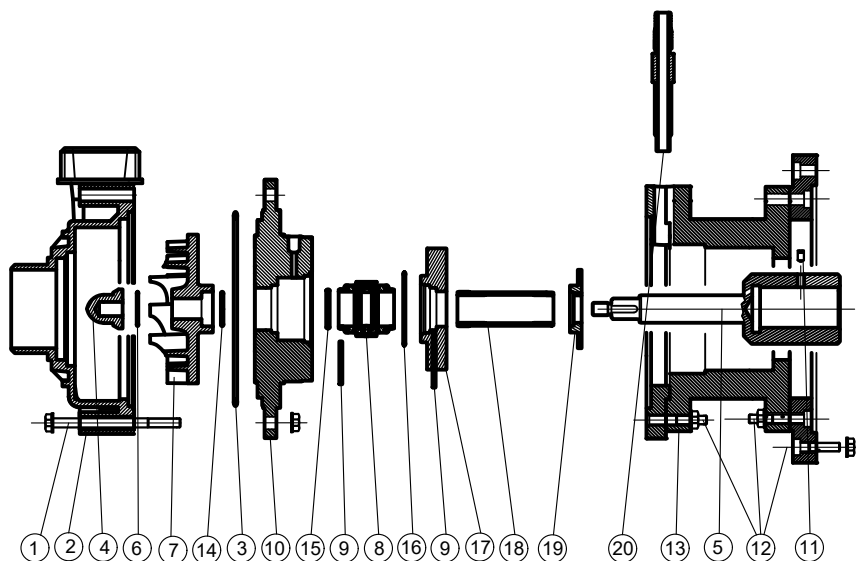


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PN	COVER	GRUB SCREWS	SET SCREWS	BRACKET + ADAPTER FLANGES	O-RING	O-RING	O-RING	SEAL FLANGE	SEAL JACKET	SEAL REFLECTOR	SEAL FLUJING
MAT.	AIN304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	CAO AIN316	EPDM VITON	PP-PVDF	●	AIN304	PP+GF PVDF+CF	AIN304	AIN304	PP	EPDM VITON	EPDM VITON	EPDM VITON	PP	PP	PP	PP

CURVES/CURVE 50HZ-2900 RPM

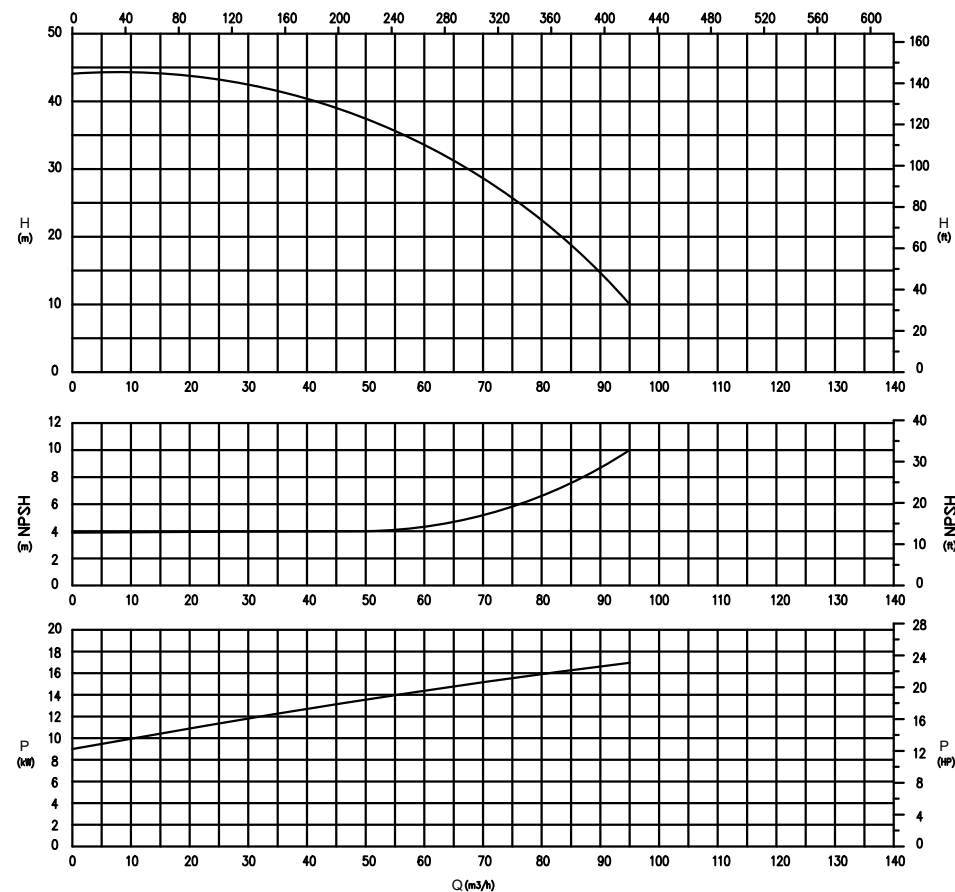

DIMENSIONS/DIMENSIONI D'INGOMBRO

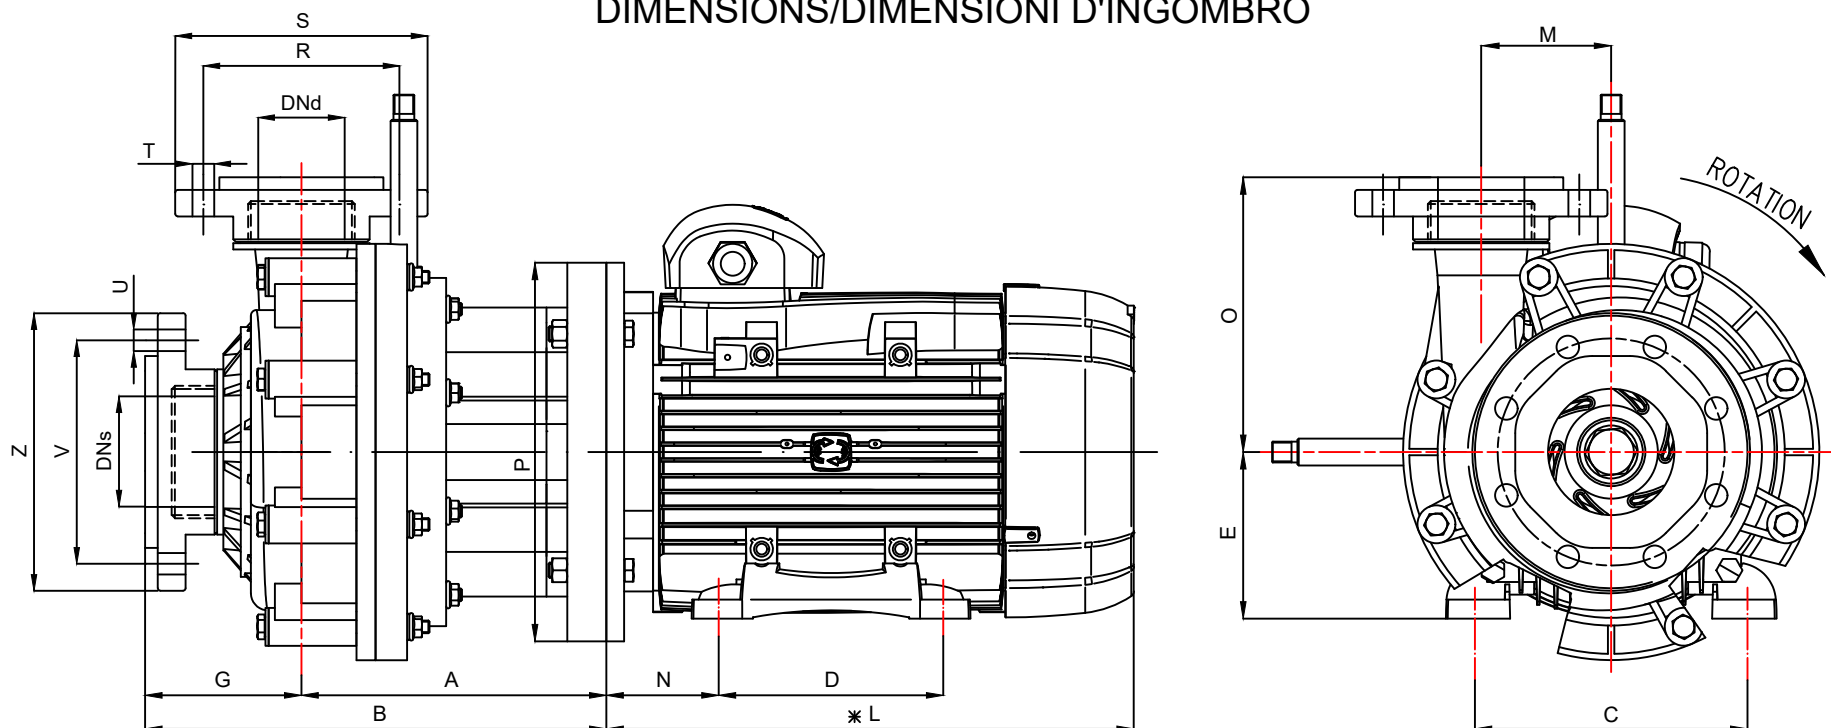


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -										FLANGES DIN PN 10-DIMENSIONS - mm -								
			A	B	C	D	E	G	*L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 180	160 MA	11	272	397	254	210	160	126	555	103	108	215.5	350	145	185	18	18	160	200	80	65
	160 MB	15	272	397	254	210	160	126	555	103	108	215.5	350	145	185	18	18	160	200	80	65
	160 L	18.5	272	397	254	254	160	126	575	103	108	215.5	350	145	185	18	18	160	200	80	65
	180 M	22	272	397	279	241	180	126	620	103	121	215.5	350	145	185	18	18	160	200	80	65

* Different according to the manufacturer / Diverso a seconda del fornitore

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	130 m ³ /h
Max head/Prevalenza massima:	48 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Internal PTFE bellows mechanical seal/Tenuta meccanica interna con soffiello in PTFE

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

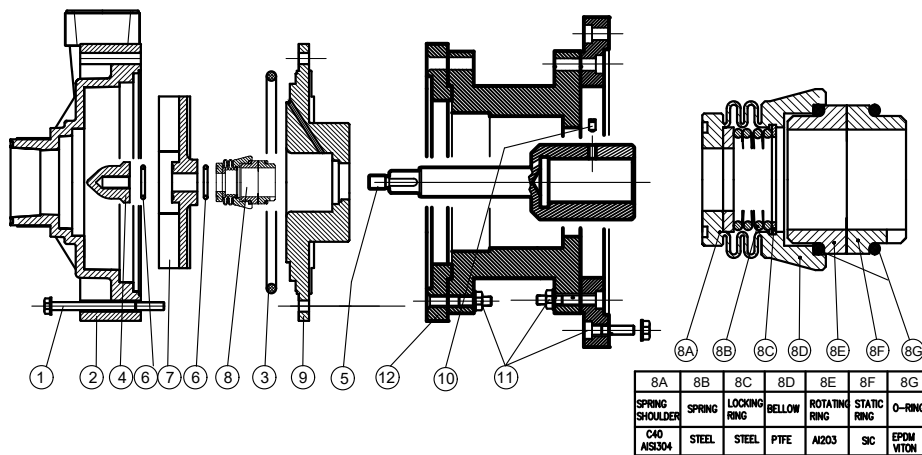


POS.	1	2	3	4	5	6	7	8	9	10	11	12
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	COVER	GRUB SCREW	SET SCREWS	BRACKET + ADAPTER FLANGES
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	C40 AISI316	EPDM VITON	PP-PVDF	●	PP+GF PVDF+CF	AISI304	AISI304	PP

CURVES/CURVE 50HZ-2900 RPM

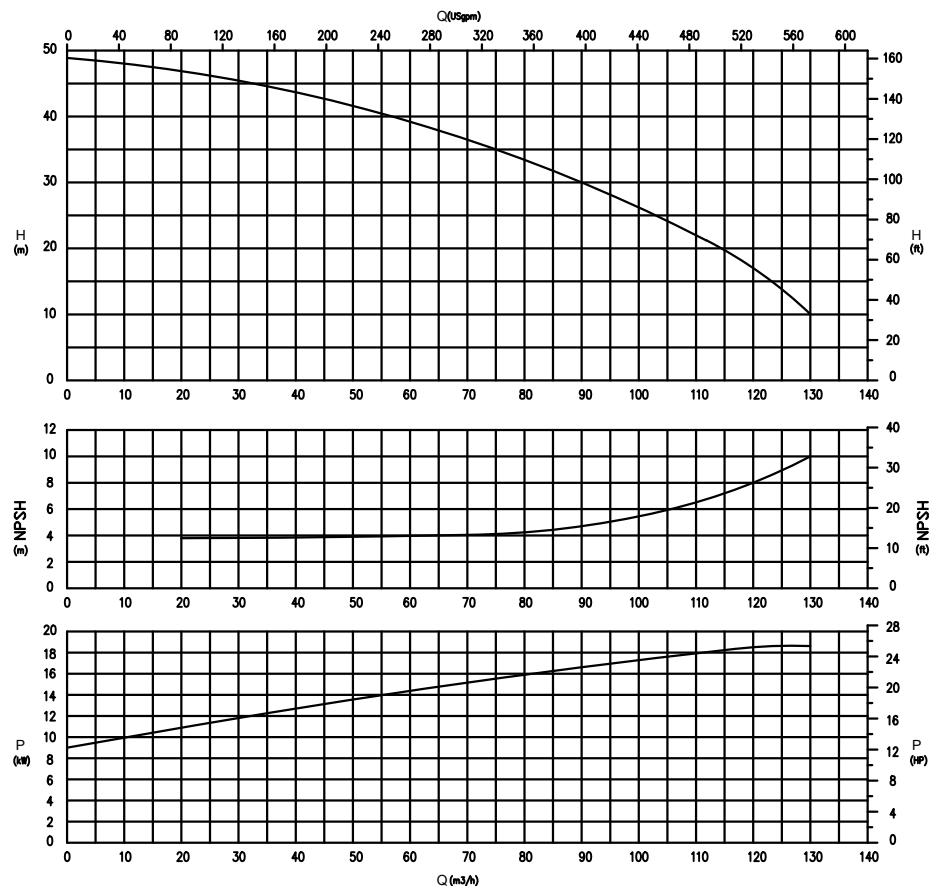

DIMENSIONS/DIMENSIONI D'INGOMBRO

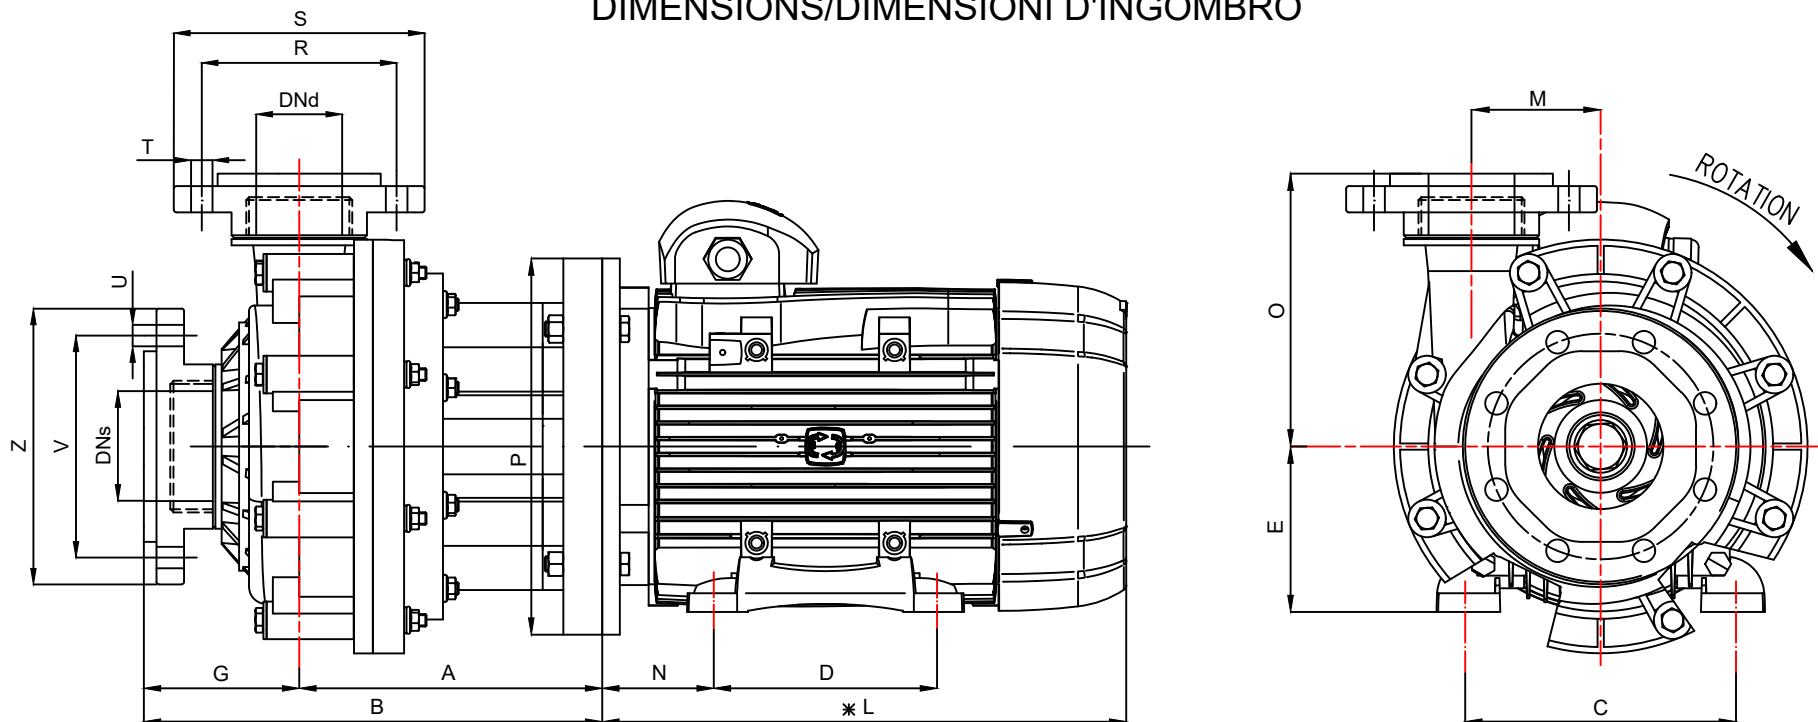


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -											FLANGES DIN PN 10-DIMENSIONS - mm -							
			A	B	C	D	E	G	*L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd
HCO 200	160 MB	15	272	395.5	254	210	160	125	555	103	108	218	350	160	200	18	18	180	220	100	80
	160 L	18.5	272	395.5	254	254	160	125	575	103	108	218	350	160	200	18	18	180	220	100	80
	180 M	22	272	395.5	279	241	180	125	620	103	121	218	350	160	200	18	18	180	220	100	80
	200 LB	37	272	395.5	318	305	200	125	675	103	133	218	400	160	200	18	18	180	220	100	80

* Different according to the manufacturer / Diverso a seconda del fornitore

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	130 m ³ /h
Max head/Prevalenza massima:	48 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Seal/Tenuta:	Double mechanical seal/ Tenuta meccanica doppia

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI


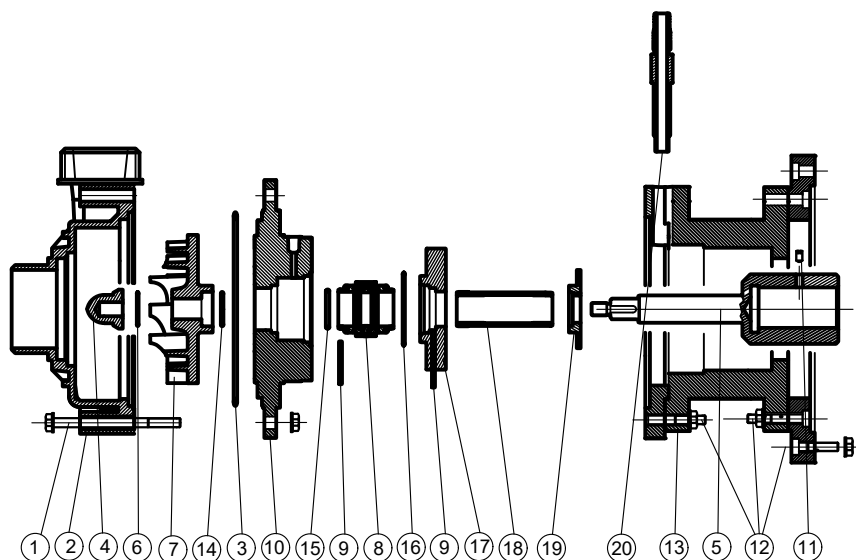


POS.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PART DESCR.	SET SCREWS	PUMP HEAD	O-RING	IMPELLER NUT	SHAFT	O-RING	IMPELLER	MECHANICAL SEAL	PN	COVER	GRUB SCREWS	SET SCREWS	BRACKET + ADAPTER FLANGES	O-RING	O-RING	O-RING	SEAL FLANGE	SEAL JACKET	SEAL DEFLECTOR	SEAL FLUING
MAT.	AIN304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	CAO AIN316	EPDM VITON	PP-PVDF	●	AIN304	PP+GF PVDF+CF	AIN304	AIN304	PP	EPDM VITON	EPDM VITON	EPDM VITON	PP	PP	PP	PP

CURVES/CURVE 50HZ-2900 RPM

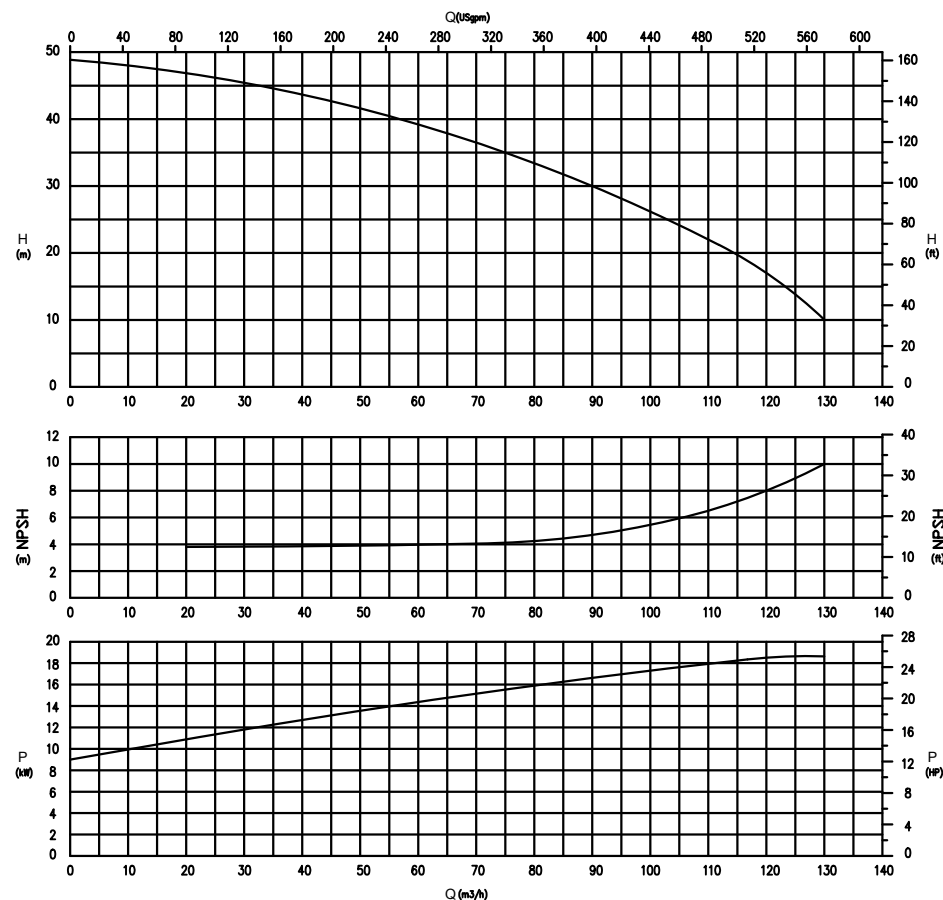

DIMENSIONS/DIMENSIONI D'INGOMBRO

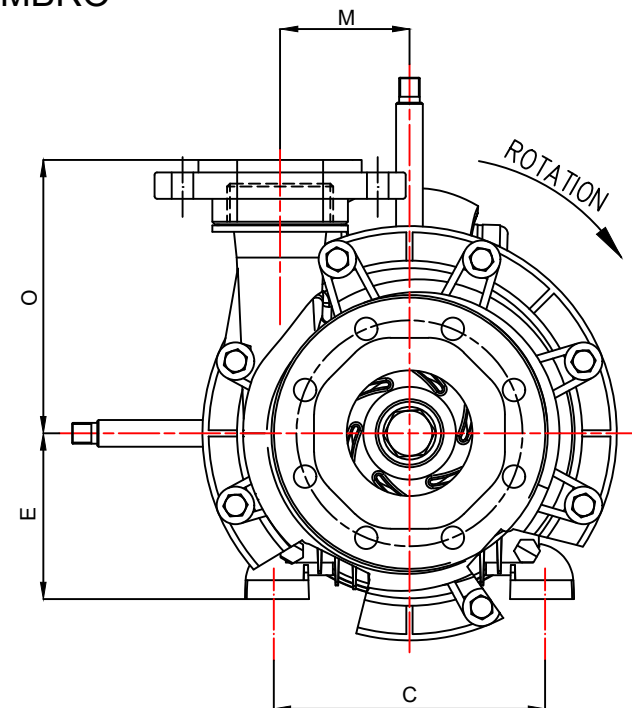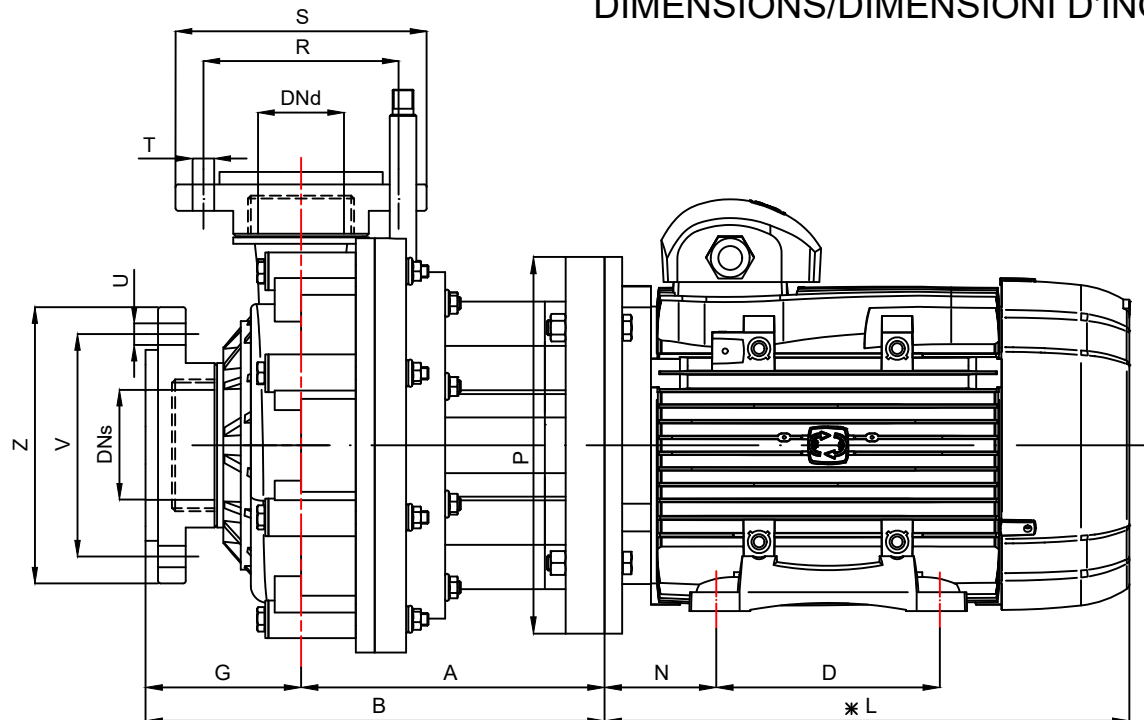

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS – mm –											FLANGES DIN PN 10-DIMENSIONS – mm –								
			A	B	C	D	E	G	✱L	M	N	O	P	R	S	T	U	V	Z	DNs	DNd	
HCO 200	160 MB	15	272	395.5	254	210	160	125	555	103	108	218	350	160	200	18	18	180	220	100	80	
	160 L	18.5	272	395.5	254	254	160	125	575	103	108	218	350	160	200	18	18	180	220	100	80	
	180 M	22	272	395.5	279	241	180	125	620	103	121	218	350	160	200	18	18	180	220	100	80	
	200 LB	37	272	395.5	318	305	200	125	675	103	133	218	400	160	200	18	18	180	220	100	80	

* Different according to the manufacturer / Diverso a seconda del fornitore