GemmeCotti
EUROPEAN PUMPS

GEMMECOTTI S.r.l.
www.gemmecotti.com
info@gemmecotti.com


HTT 2000 PP-PVDF

Dis. 10344-0

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:		PP–PVDF
Max flow/Portata massima:		2.0 m3/h
Max head/Prevalenza massima:		21 m
Max temperature/Temperatura massima:		PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:		45 cPs
Pressure rating/Pressione nominale massima:		NP/PN 6
Pump weight/Peso pompa:	PP	2.8 Kg.
	PVDF	3.8 Kg.
Motor/Motore:		0.75 kW 8,4Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

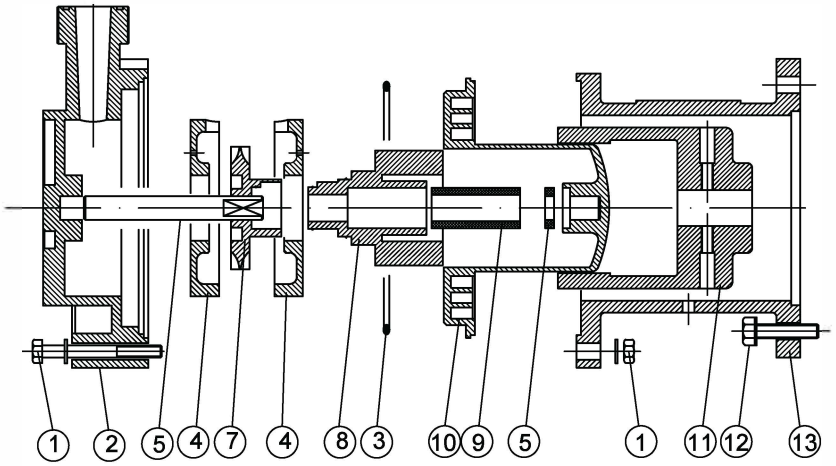

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O–RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP–PVDF	Al203	PVDF	PP–PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AISI304	PP

CURVES/CURVE 60HZ-3500 RPM

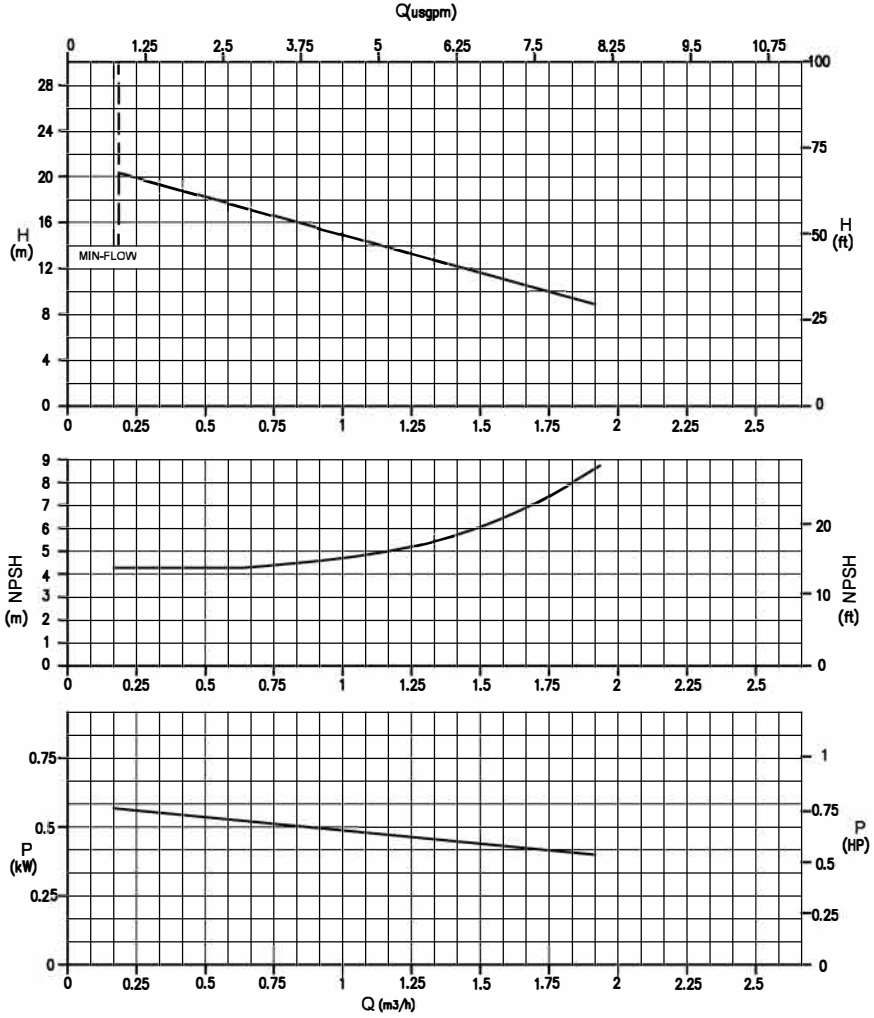

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

GemmeCotti
EUROPEAN PUMPS

GEMMECOTTI S.r.l.
www.gemmecotti.com
info@gemmecotti.com


HTT 3000 PP-PVDF

Dis. 10345-0

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:		PP–PVDF
Max flow/Portata massima:		2.7 m3/h
Max head/Prevalenza massima:		29 m
Max temperature/Temperatura massima:		PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:		45 cPs
Pressure rating/Pressione nominale massima:		NP/PN 6
Pump weight/Peso pompa:	PP	2.8 Kg.
	PVDF	3.8 Kg.
Motor/Motore:		1.1 kW 10,2 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

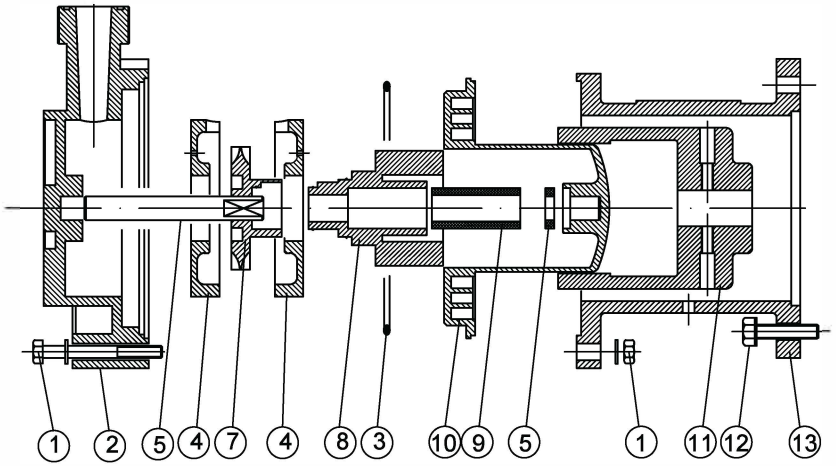

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O–RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP–PVDF	Al203	PVDF	PP–PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AISI304	PP

CURVES/CURVE 60HZ-3500 RPM

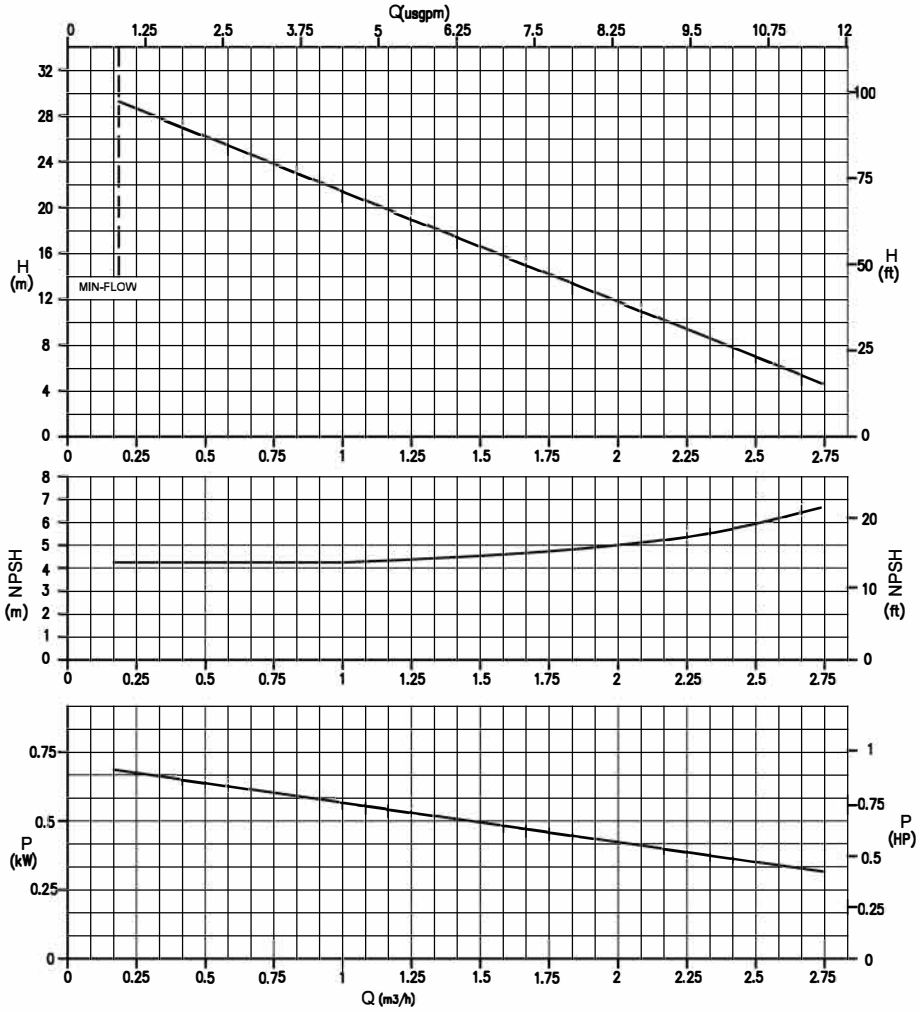

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

GemmeCotti
EUROPEAN PUMPS

GEMMECOTTI S.r.l.
www.gemmecotti.com
info@gemmecotti.com


HTT 5000 PP-PVDF

Dis. 10346-0

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:		PP–PVDF
Max flow/Portata massima:		5 m3/h
Max head/Prevalenza massima:		31 m
Max temperature/Temperatura massima:		PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:		45 cPs
Pressure rating/Pressione nominale massima:		NP/PN 6
Pump weight/Peso pompa:	PP	8 Kg.
	PVDF	10 Kg.
Motor/Motore:		2.2 kW 16,2 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

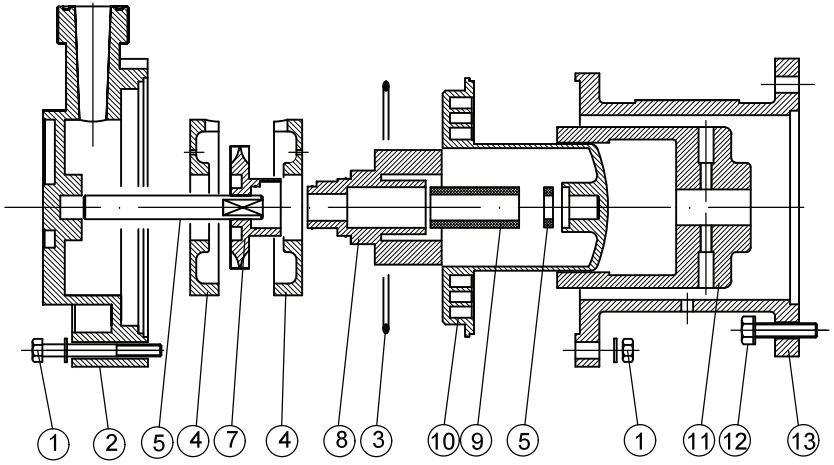

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP–PVDF	Al203	PVDF	PP–PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AISI304	PP

CURVES/CURVE 60HZ-3500 RPM

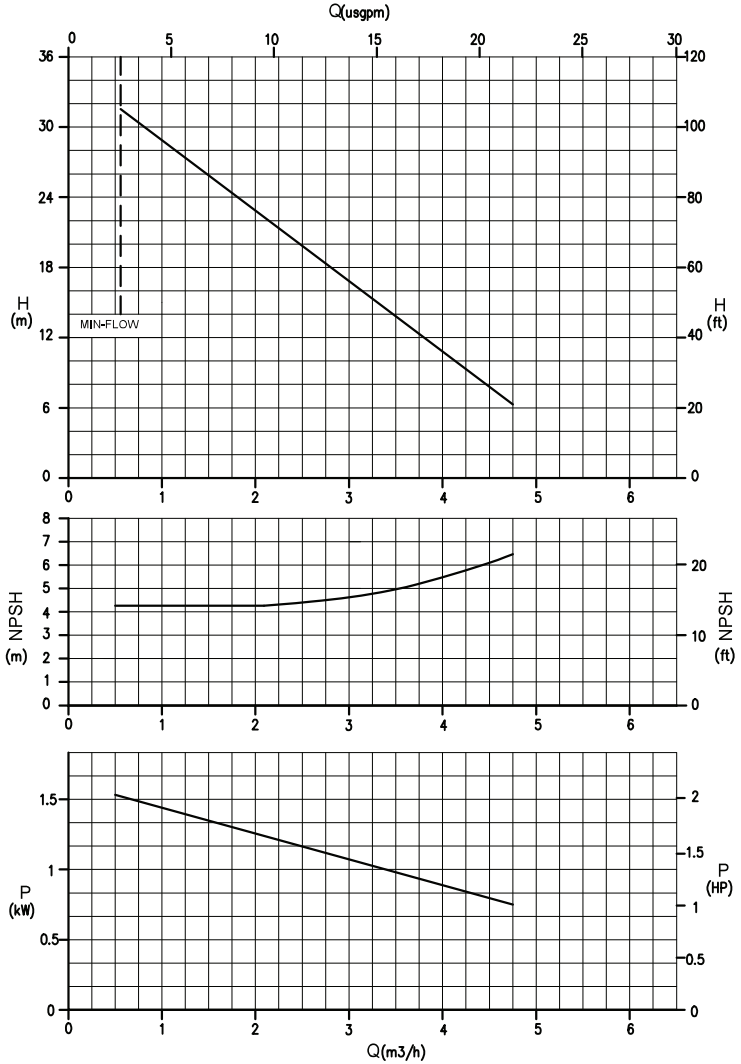

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

GemmeCotti
EUROPEAN PUMPS

GEMMECOTTI S.r.l.
www.gemmecotti.com
info@gemmecotti.com


HTT 7000 PP-PVDF

Dis. 10347-0

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:		PP–PVDF
Max flow/Portata massima:		7m3/h
Max head/Prevalenza massima:		56 m
Max temperature/Temperatura massima:		PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:		45 cPs
Pressure rating/Pressione nominale massima:		NP/PN 6
Pump weight/Peso pompa:	PP	8 Kg.
	PVDF	10 Kg.
Motor/Motore:		5.5 kW 44,1 kg ATEX 5.5 kW 65 kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

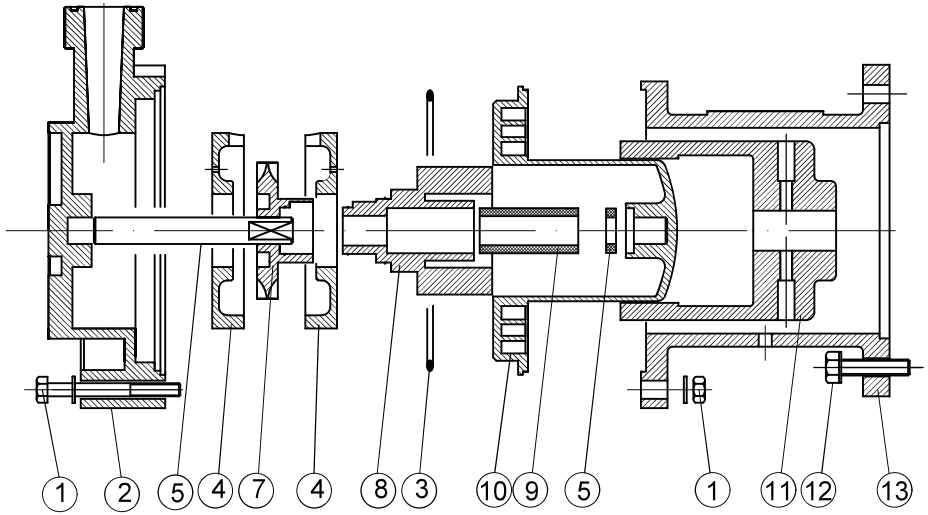

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O–RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP–PVDF	Al203	PVDF	PP–PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AISI304	PP

CURVES/CURVE 60HZ-3500 RPM

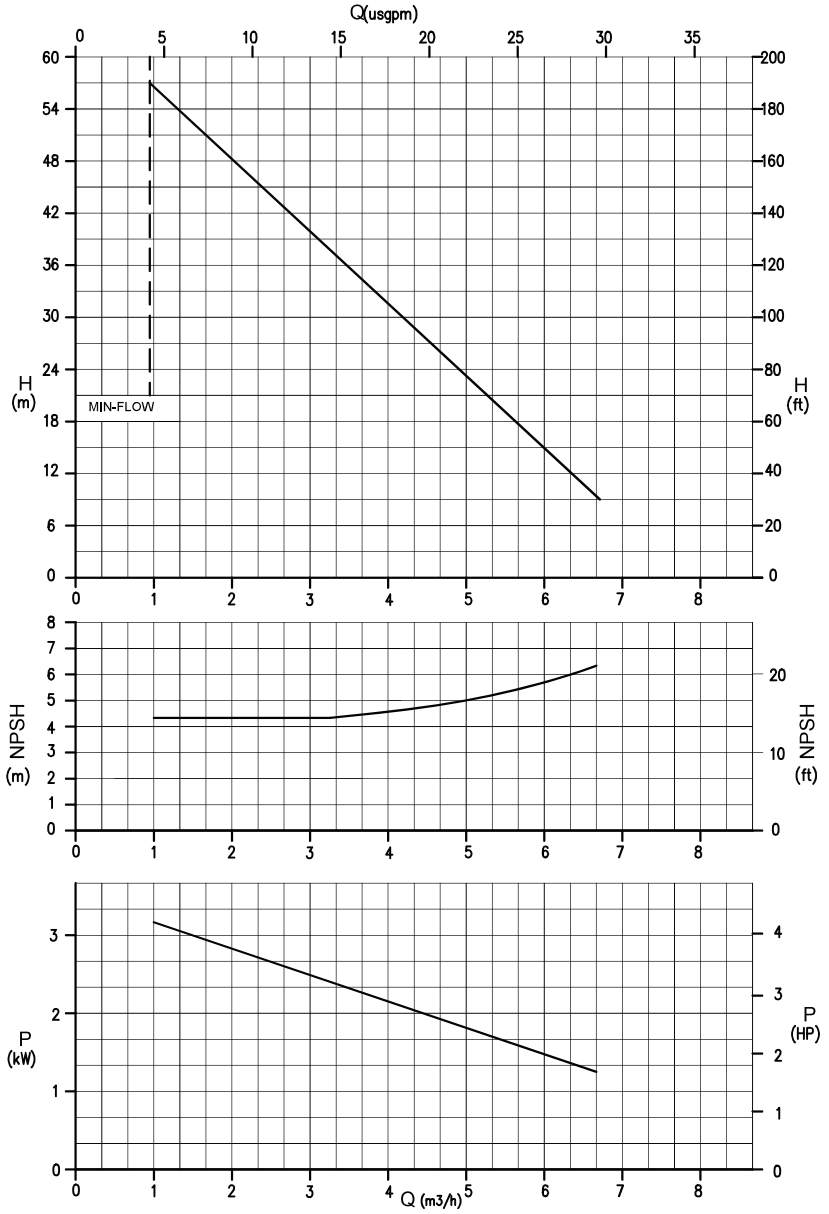

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

GemmeCotti
EUROPEAN PUMPS

GEMMECOTTI S.r.l.
www.gemmecotti.com
info@gemmecotti.com


HTT 9000 PP-PVDF

Dis. 10348-0

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:		PP–PVDF
Max flow/Portata massima:		9.5 m3/h
Max head/Prevalenza massima:		51 m
Max temperature/Temperatura massima:		PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:		45 cPs
Pressure rating/Pressione nominale massima:		NP/PN 6
Pump weight/Peso pompa:	PP	8 Kg.
	PVDF	10 Kg.
Motor/Motore:		5.5 kW 44 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

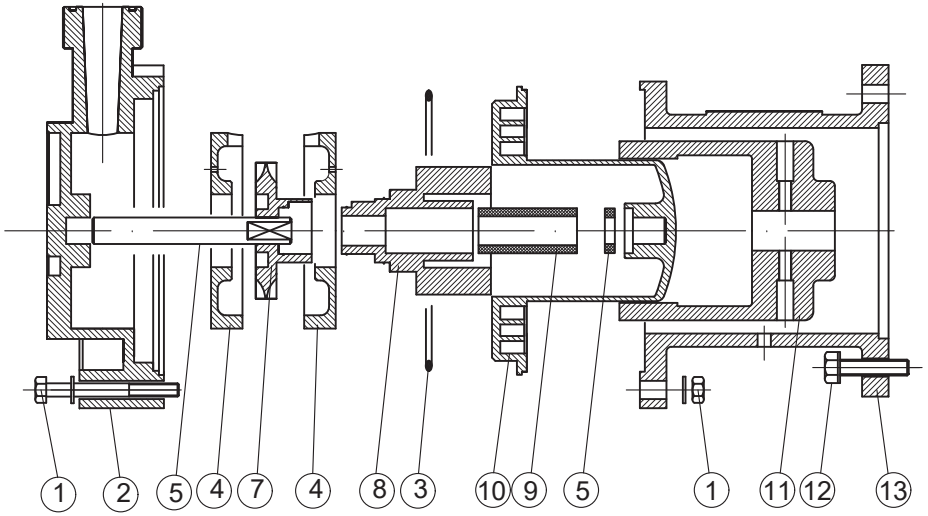

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O–RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AISI304	PP+GF PVDF+CF	EPDM VITON	PP–PVDF	Al2O3	PVDF	PP–PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AISI304	PP

CURVES/CURVE 60HZ-3500 RPM

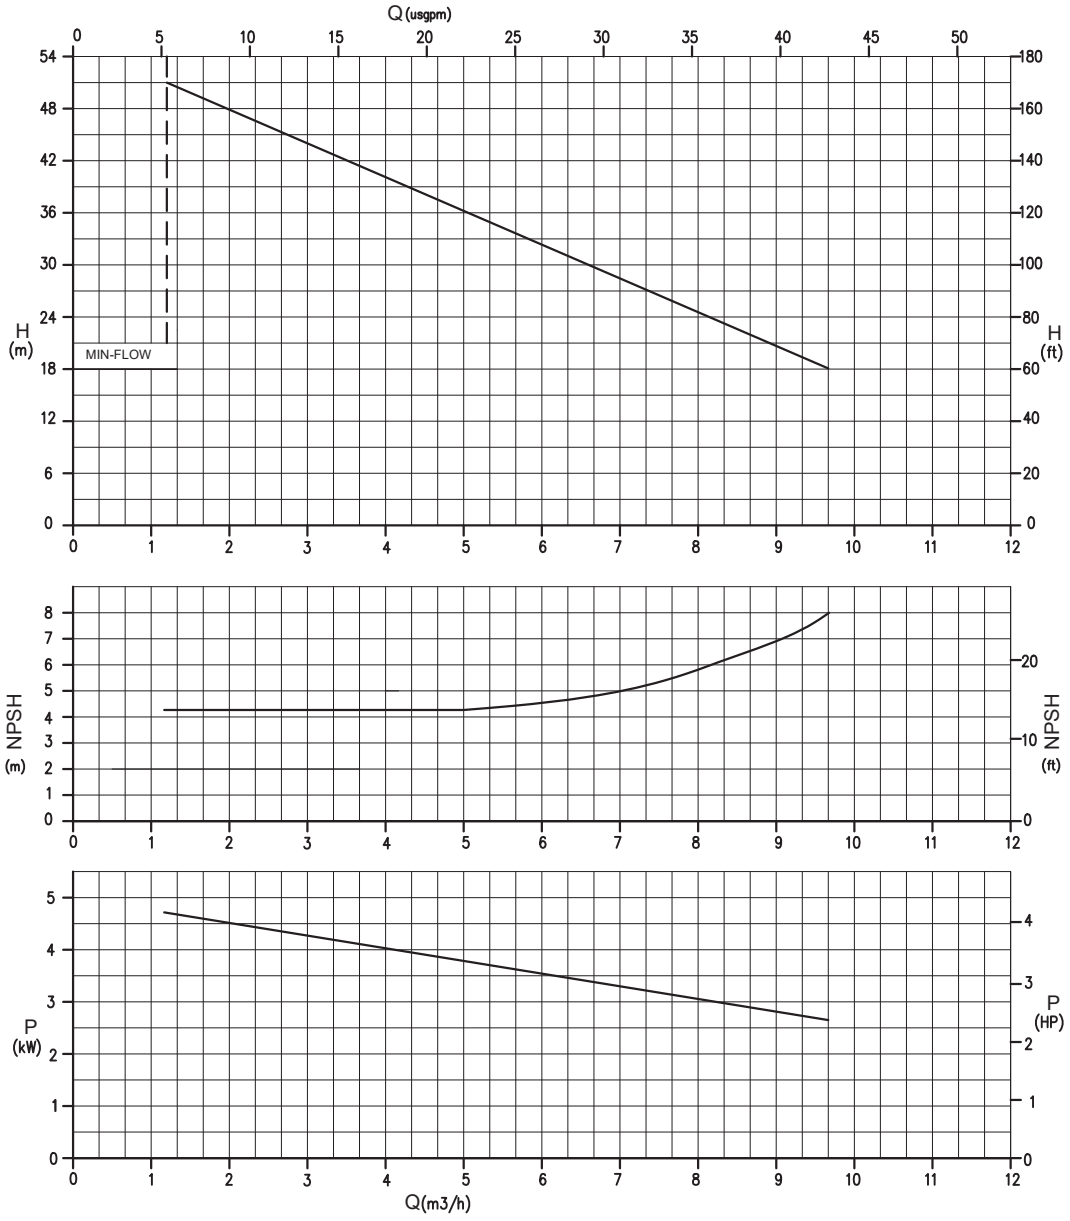

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso