


FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	2.0 m ³ /h
Max head/Prevalenza massima:	21 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 2.8 Kg. PVDF 3.8 Kg.
Motor/Motore:	0.75 kW 8,4Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

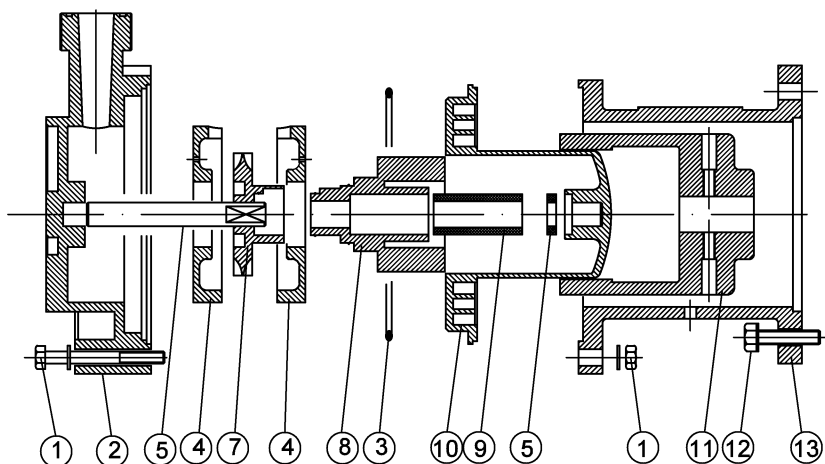

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	AL203	PVDF	PP-PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	ALSI304	PP

CURVES/CURVE 60HZ-3500 RPM

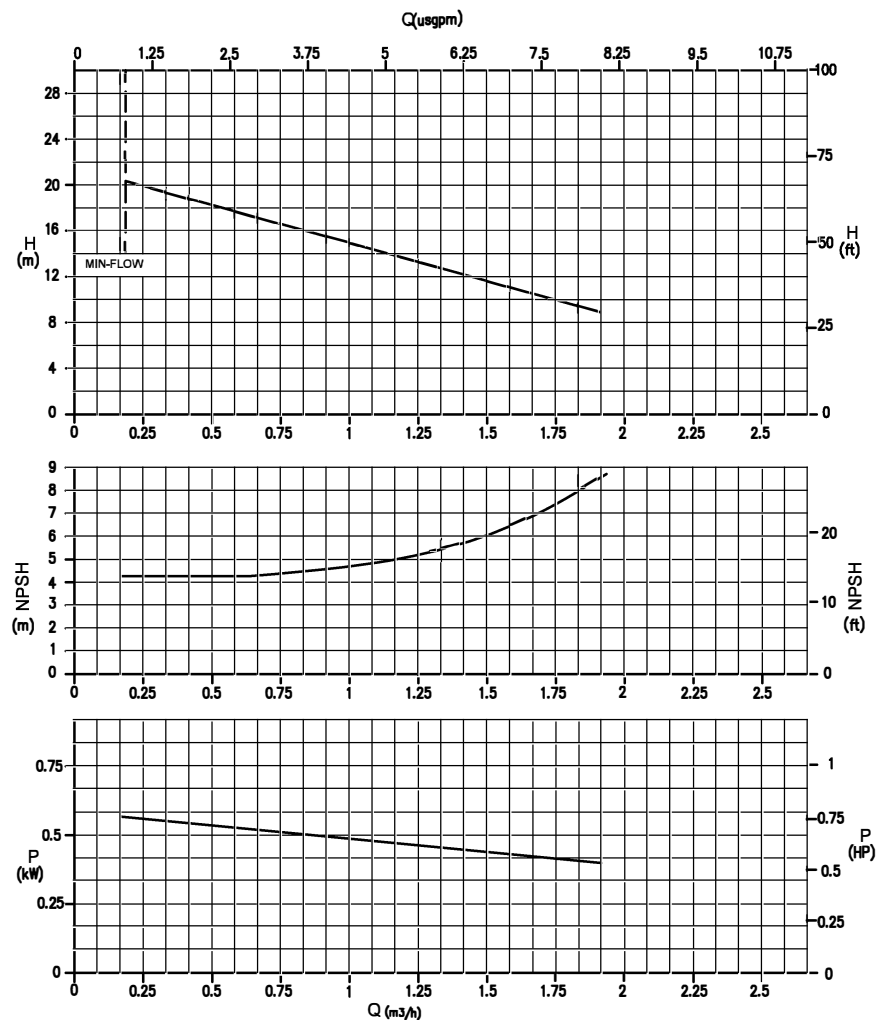


All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	2.7 m ³ /h
Max head/Prevalenza massima:	29 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 2.8 Kg. PVDF 3.8 Kg.
Motor/Motore:	1.1 kW 10,2 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

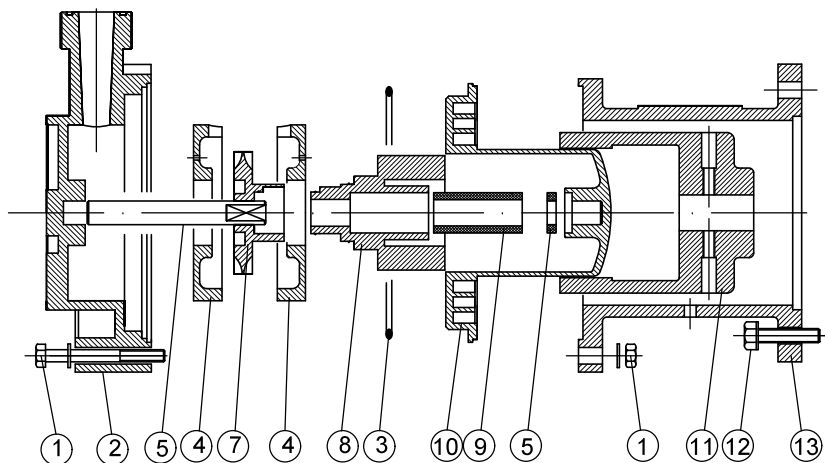

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	ALSI304	PP

CURVES/CURVE 60HZ-3500 RPM

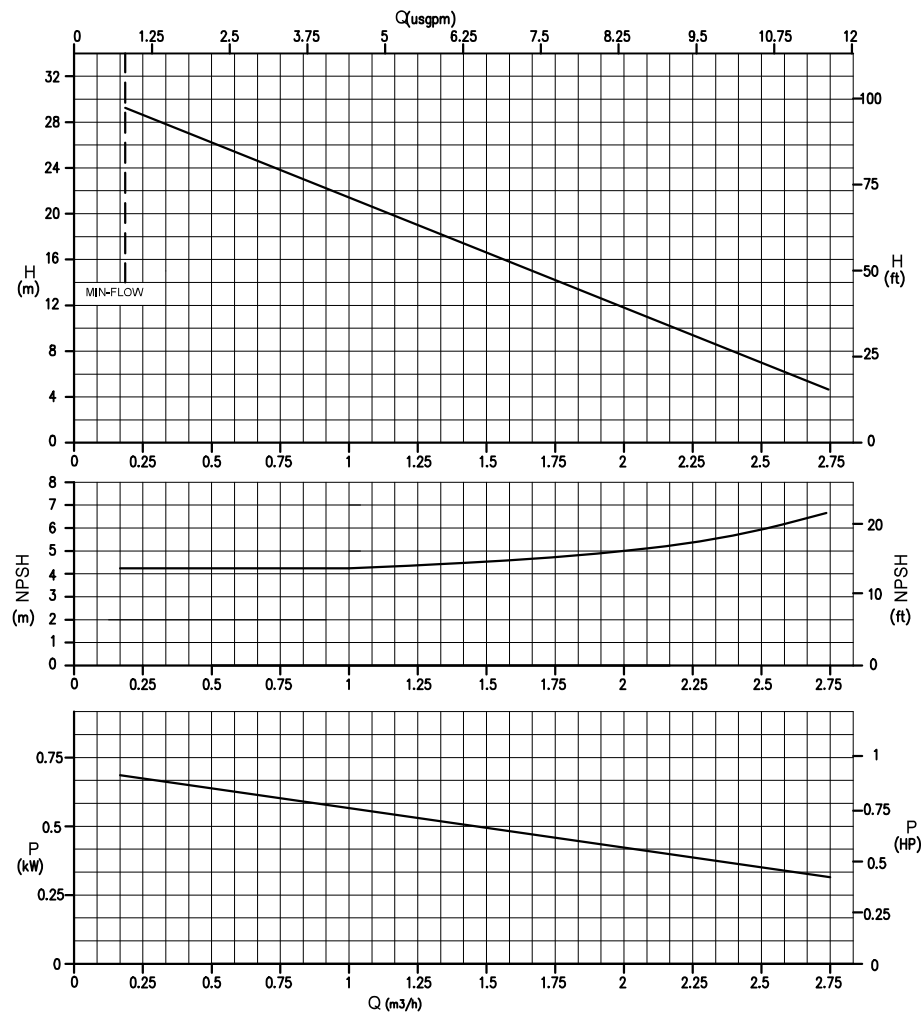


All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	5 m ³ /h
Max head/Prevalenza massima:	31 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.
Motor/Motore:	2.2 kW 16,2 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

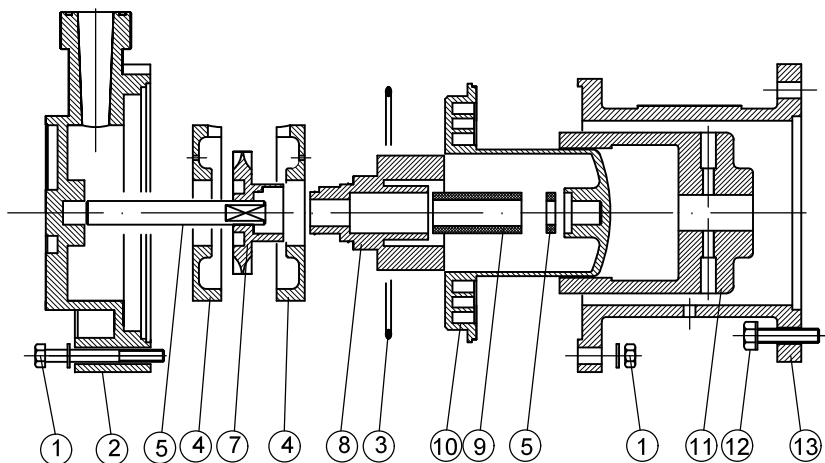

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AlSi304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	AlSi304	PP


CURVES/CURVE 60HZ-3500 RPM

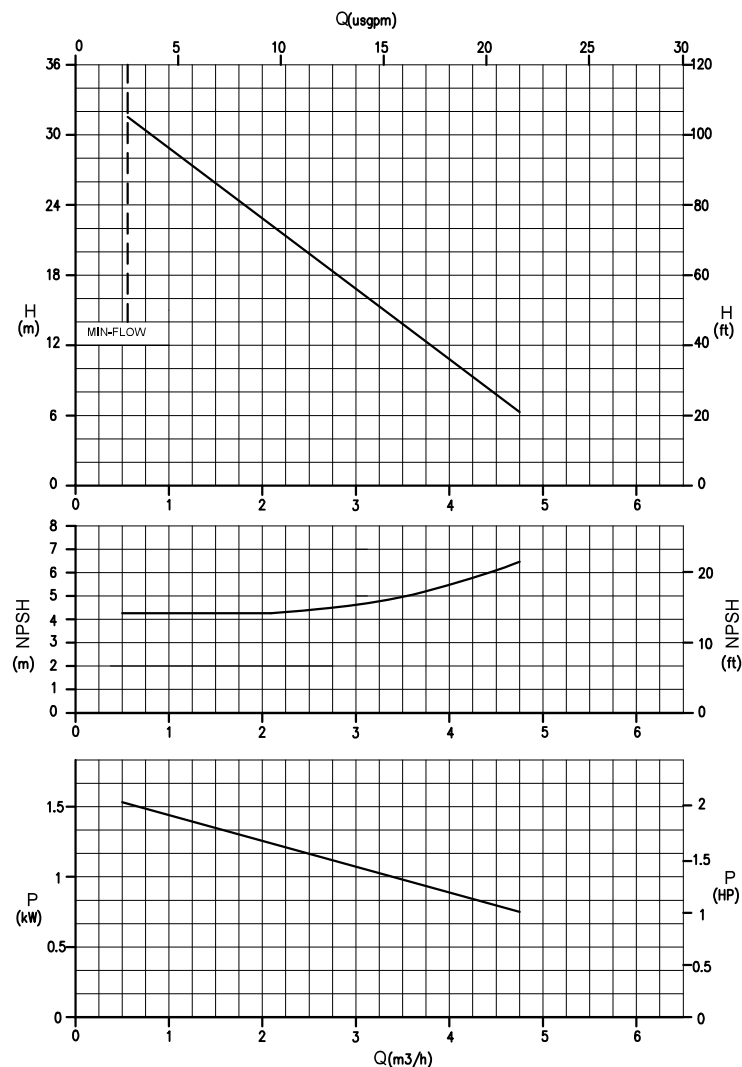

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	7m ³ /h
Max head/Prevalenza massima:	56 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.
Motor/Motore:	5.5 kW 44,1 kg ATEX 5.5 kW 65 kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

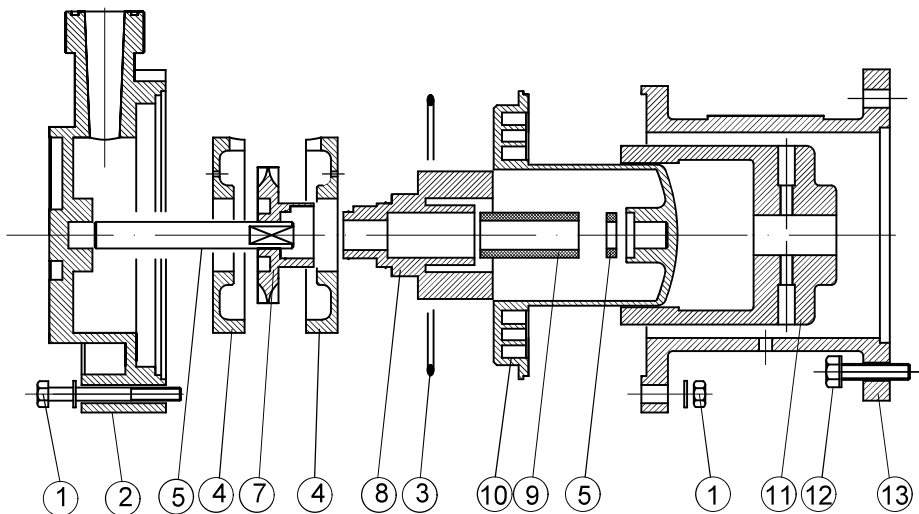

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	ALSI304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	AL203	PVDF	PP-PVDF NdFeB	PTFEC	PP+GF PVDF+CF	C40 NdFeB	ALSI304	PP


CURVES/CURVE 60HZ-3500 RPM

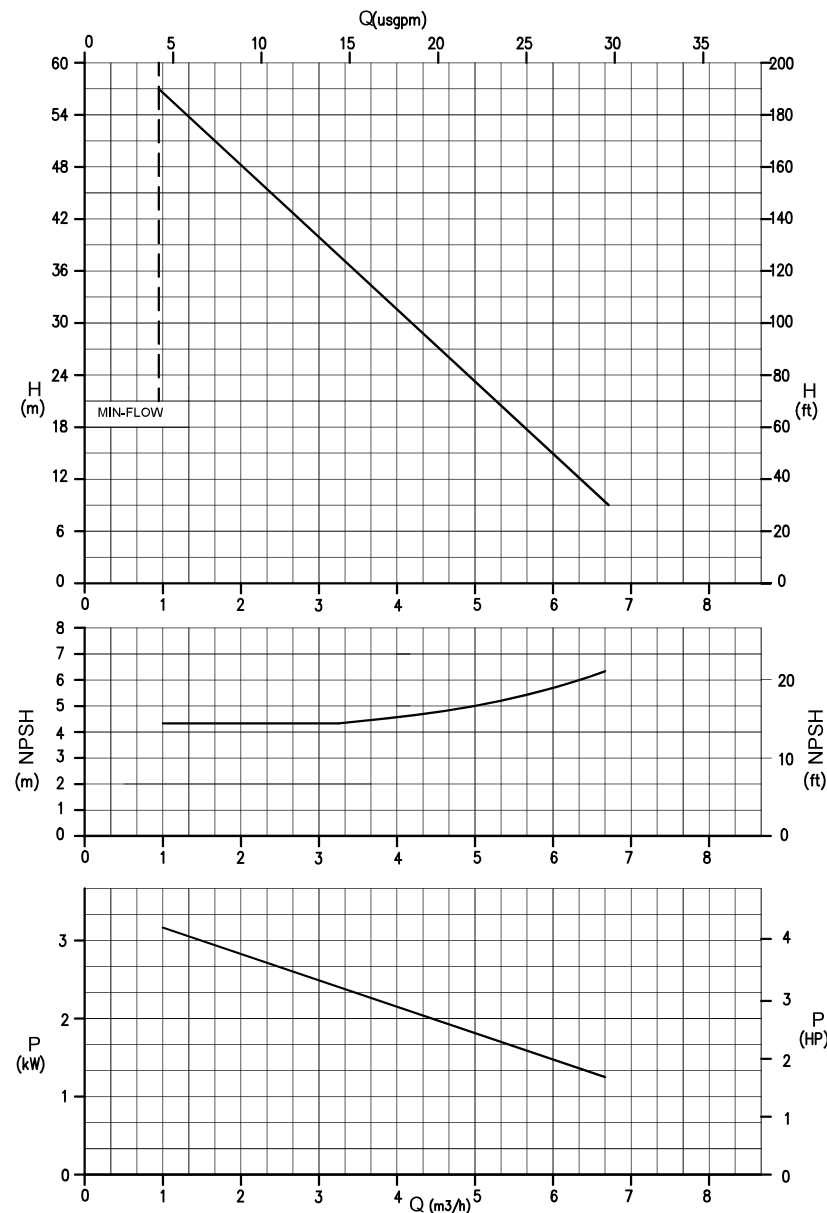

FEATURES/CARATTERISTICHE




Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	9.5 m ³ /h
Max head/Prevalenza massima:	51 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.
Motor/Motore:	7.5 kW 52,0 Kg ATEX 7.5 kW 68,0 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

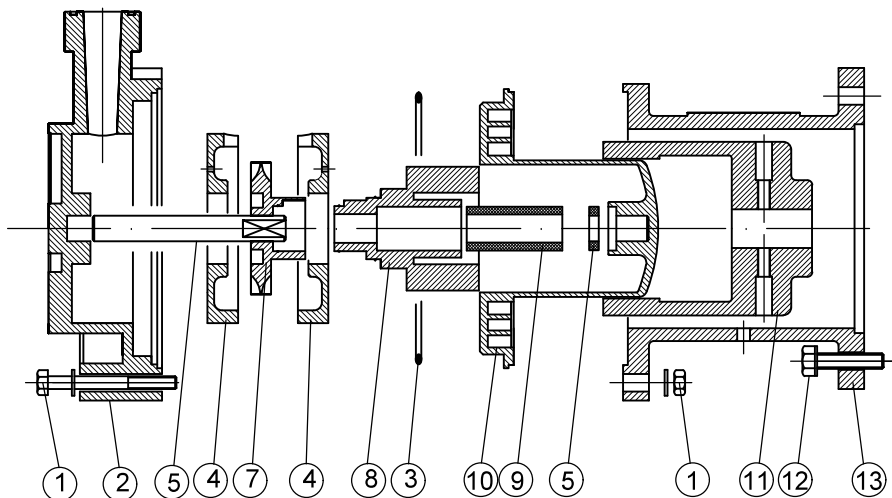

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AlSi304	PP+GF PVDF+CF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeB	PTFE	PP+GF PVDF+CF	C40 NdFeB	AlSi304	PP

CURVES/CURVE 60HZ-3500 RPM

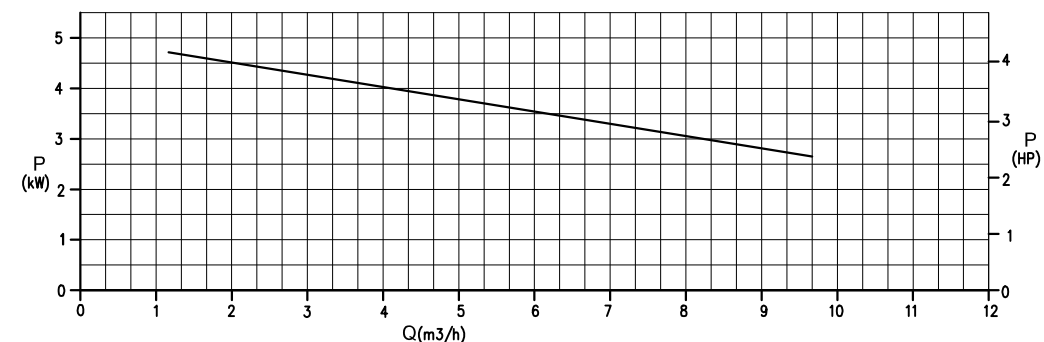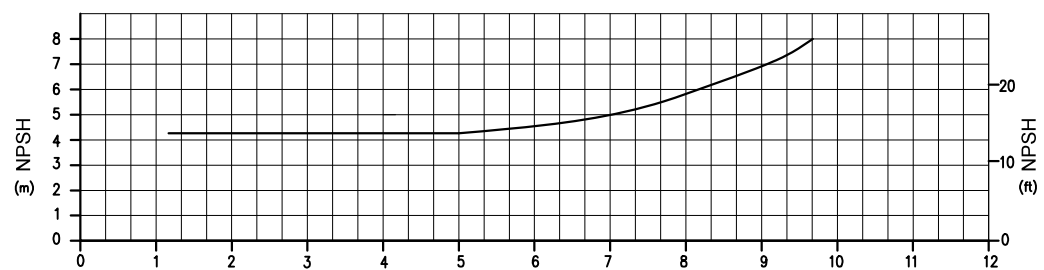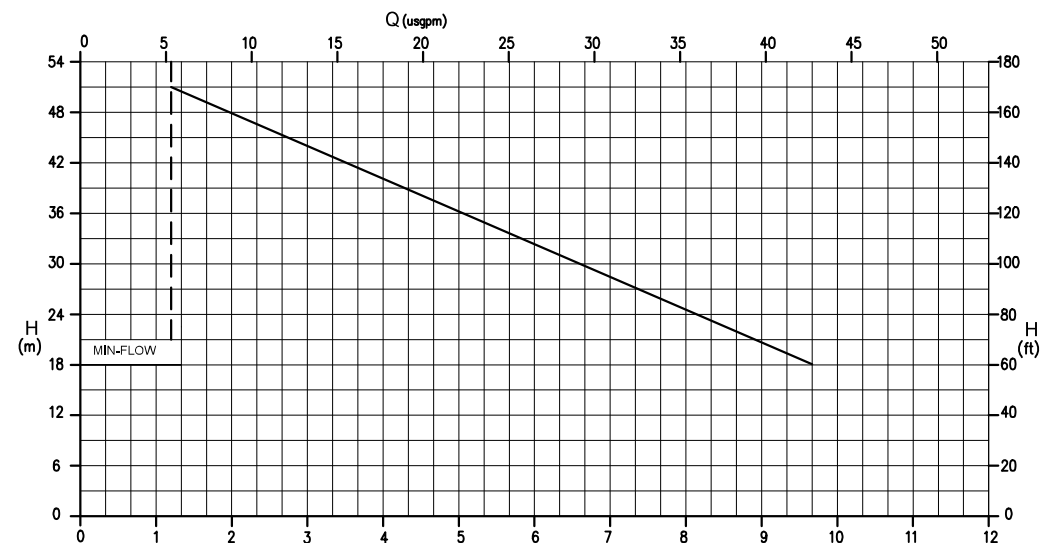

All data stated are an indication and are liable to change without notice / Tutti i dati sono indicativi e possono variare senza preavviso